


(/)



Journals, books & databases

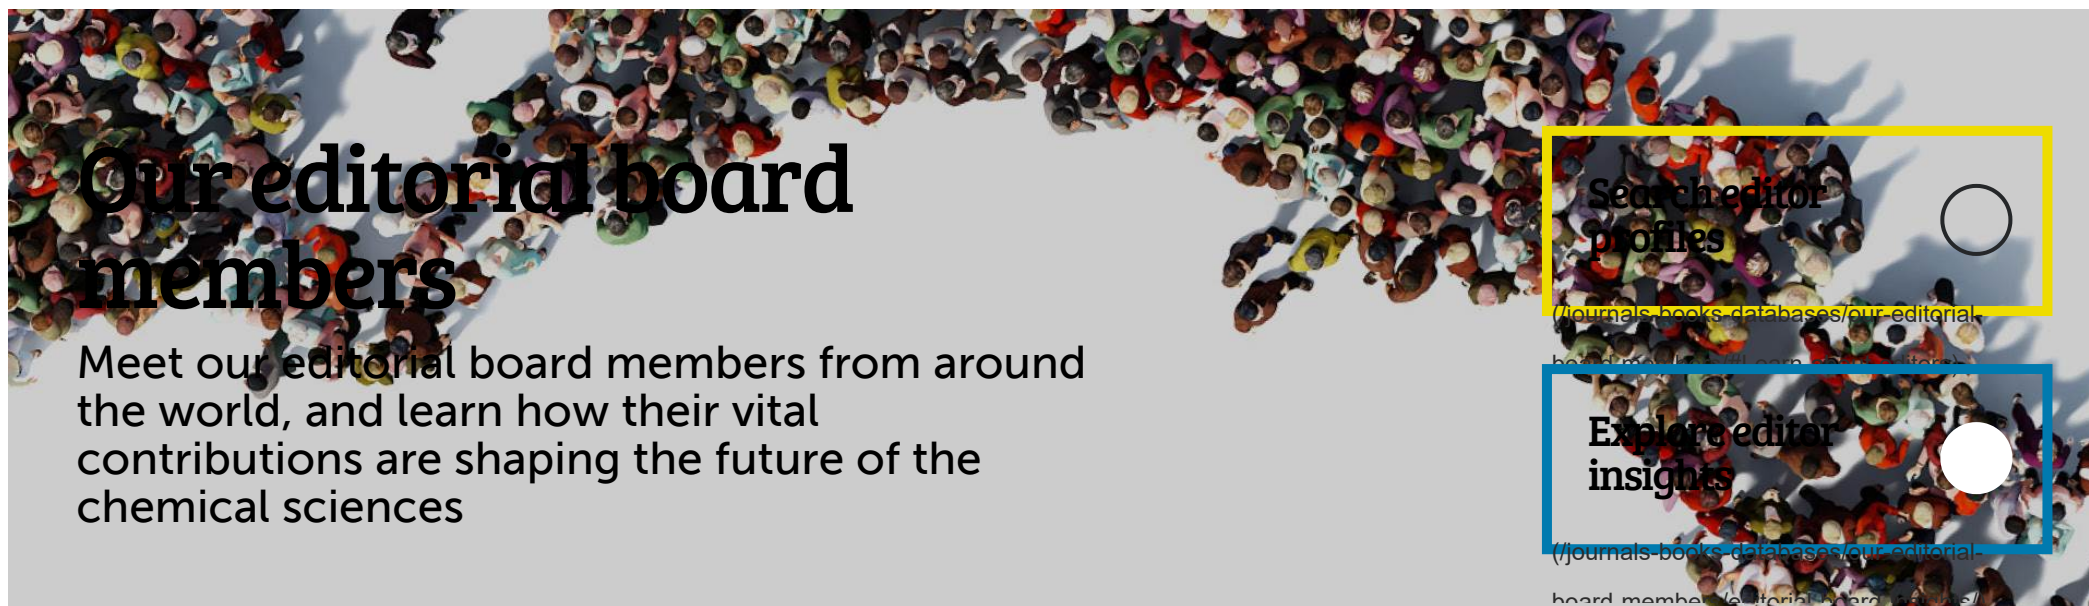

# Our editorial board members

Meet our editorial board members from around the world, and learn how their vital contributions are shaping the future of the chemical sciences

[Search editor profiles](#)

[Explore editor insights](#)

# How do we lead the way for the scientific community?

How do we lead the way for the scientific community?



Editorial board members are an integral part of academic publishing. They frame the breadth of chemical enquiry, ask crucial questions to delve further into research, and help guide the chemical science community towards future discoveries.

Offering their expertise to ensure outstanding, high quality science, editorial board members define the scope of cutting-edge scientific literature.

At the Royal Society of Chemistry, we want to recognise the dedication and vital contributions of our editorial board members from around the world – working as ambassadors, researchers and key opinion leaders.

### **On this page:**

[Why are editorial boards important](/journals-books-databases/our-editorial-board-members/#importance)

[Our diverse and inclusive editorial boards](/journals-books-databases/our-editorial-board-members/#diverse)

[Learn more about our editorial board members](/journals-books-databases/our-editorial-board-members/#Learn-about-editors)

---

## Why are editorial boards important?

Editorial board members are crucial to the work we do, not only because of their involvement in research developments, but also because of the role they play within the scientific community.

Each Royal Society of Chemistry journal and book series has its own editorial board, which is responsible for deciding key elements of our publishing criteria, such as setting and maintaining the RSC scientific policies and standards. These boards are made up of leading scientists who are active in academia or industry, and they apply their knowledge and expertise to support the development of the journals and books, as well as uphold a consistently high standard of content. This work helps shape the future of the chemical science community.

Our editorial board comprises over 650 outstanding researchers from more than 30 countries. They make an impactful contribution to the titles they work on and play a crucial role in advancing discovery and innovation in the chemical sciences.

“ I enjoy the communications, feedback, possible discussions and, somehow, recognition ”

Zhen Li

Wuhan University, China

Editorial board member, *Materials Chemistry Frontiers* ([/journals-books-databases/about-journals/materials-chemistry-frontiers/](https://www.rsc.org/journals-books-databases/about-journals/materials-chemistry-frontiers/)).



# Responsibilities of editorial board members

Editorial board member responsibilities cover a wide range. In addition to their broader duties, they may also play specific roles, depending on their respective journals or books.

Some of their main responsibilities include:

- Shaping strategy and scope to ensure the content and quality meets Royal Society of Chemistry standards
- Acting as ambassadors of publishing in the dynamic global science community
- Helping to attract a diverse group of suitable expert authors around the world

“The Royal Society of Chemistry truly values diversity”

Tanja Junkers

Monash University, Australia

Associate editor, *Chemical Science* ([/journals-books-databases/about-journals/chemical-science/](https://www.rsc.org/journals-books-databases/about-journals/chemical-science/)) and *Polymer Chemistry* ([/journals-books-databases/about-journals/polymer-chemistry/](https://www.rsc.org/journals-books-databases/about-journals/polymer-chemistry/)).



---

## Our diverse and inclusive editorial boards


We value different points of view and want to foster a welcoming and inclusive environment.

As part of this commitment, we have commissioned a new report called [\*A sense of belonging in the chemical sciences\*](#) ([new-perspectives/talent/belonging-in-the-chemical-sciences/](#)), which is the first of its kind. It investigates the barriers to an inclusive community, as well as what we can do to tackle these challenges and enable more connection, respect and diversity.

We have a diverse team of editorial board members across the wide range of RSC journals and books. With their abundant expertise and passion, they have helped us move forward our publishing and shape chemistry for the future. With editorial board members across six continents, the Royal Society of Chemistry spans a global network of dedicated and enthusiastic science professionals.

# Representation of editorial board members across continents



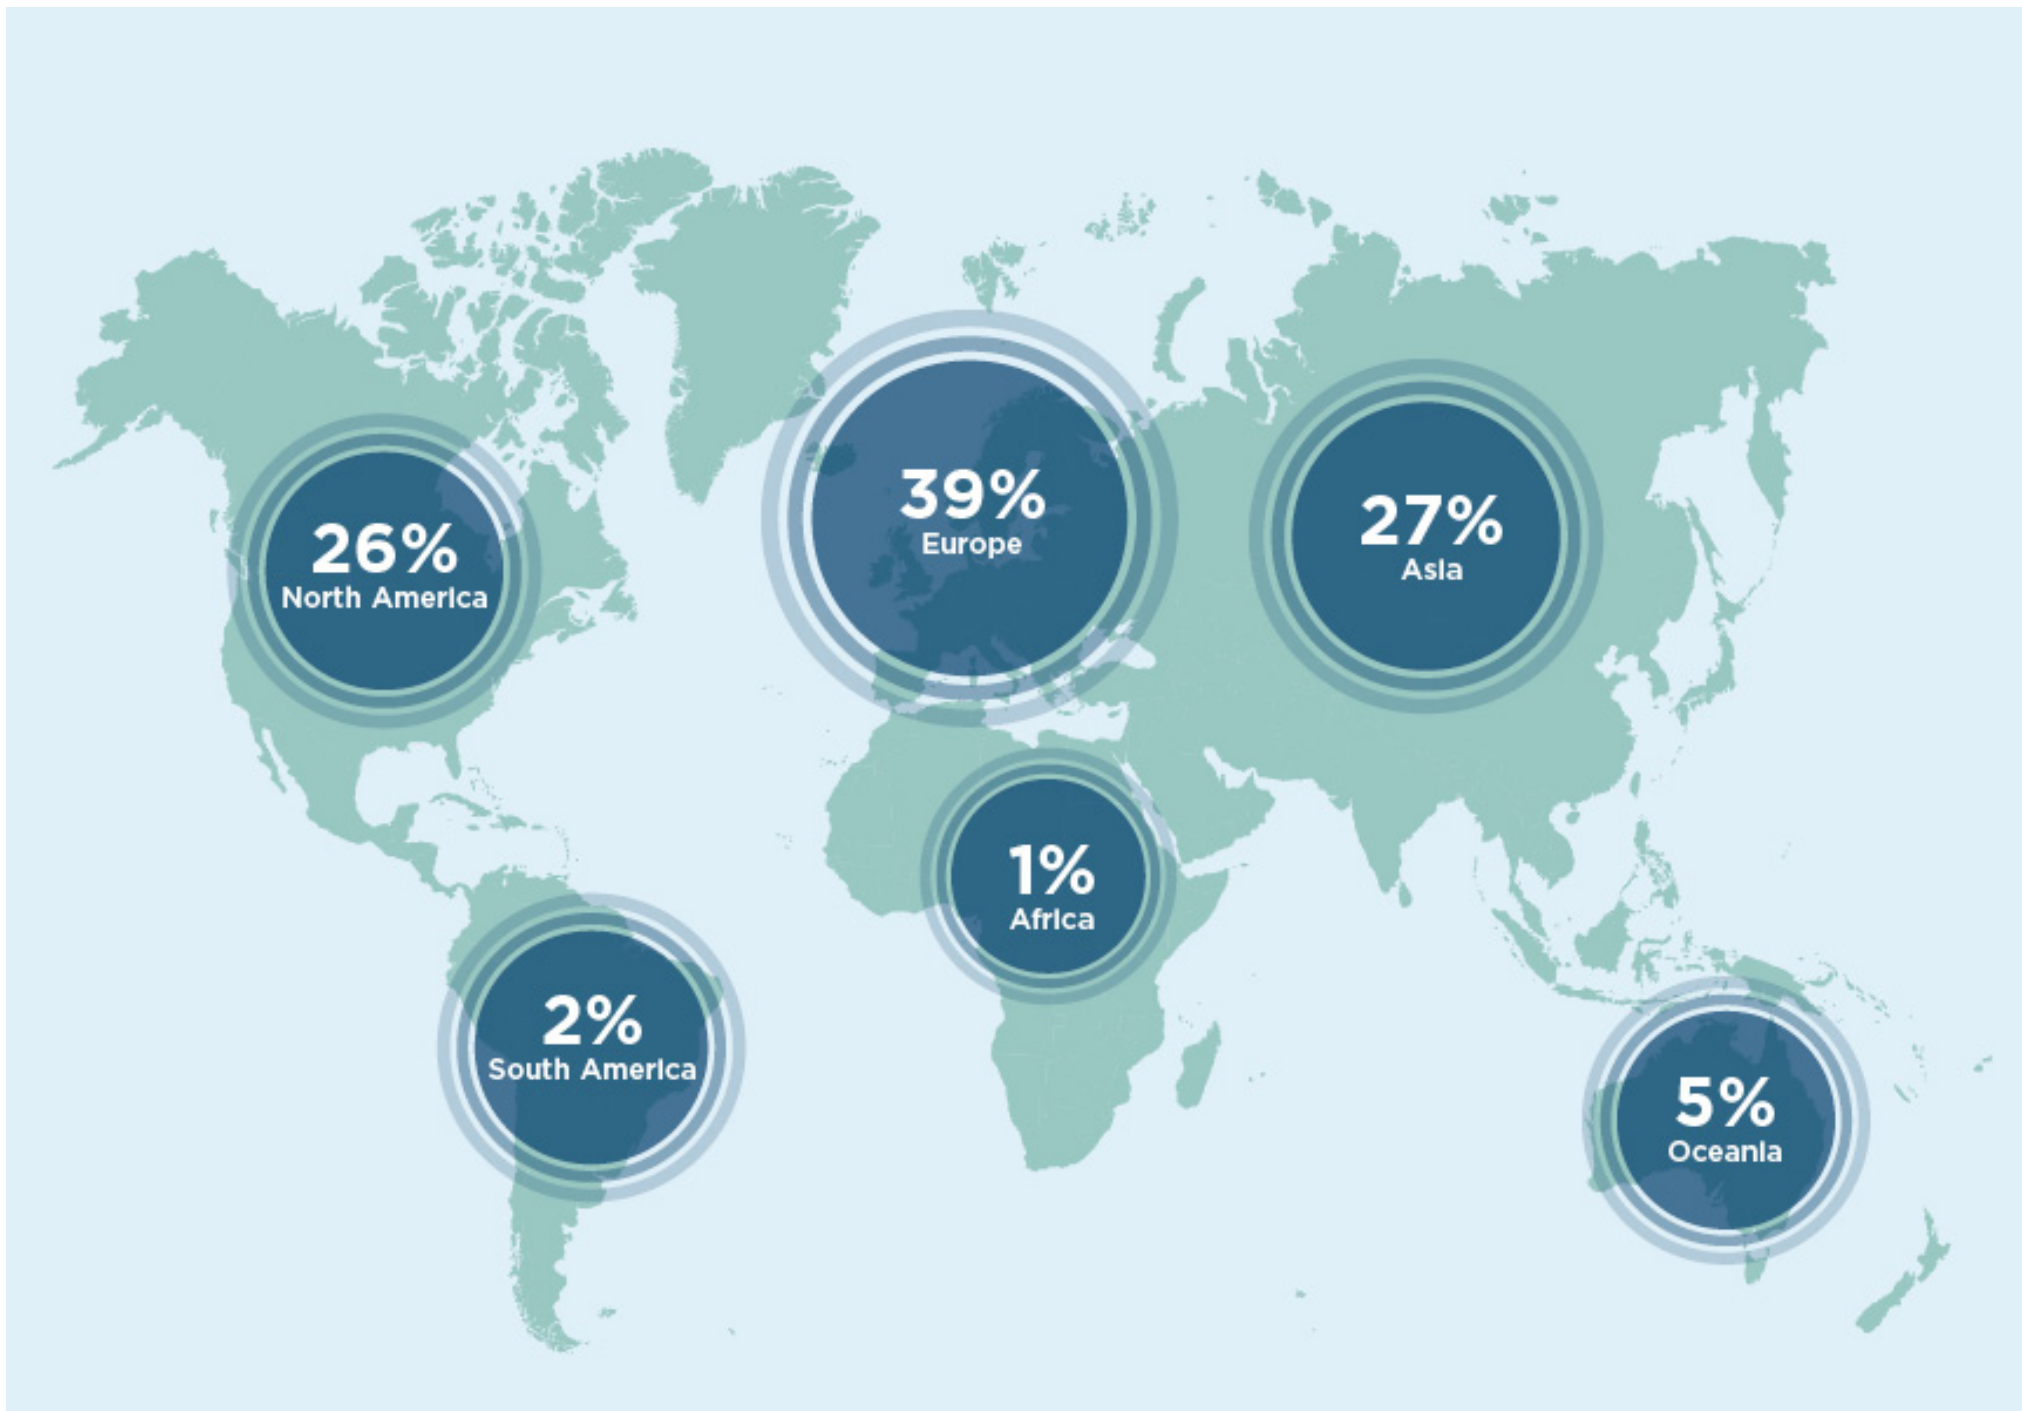

\*Percentages are based on data collected from individual journals and books before 28 September 2021. Data is held on the geographical location and employment of editorial board members through their affiliations.

“ Royal Society of Chemistry journals strike a chord with the scientific community, the world over, through the authentic spread of scientific literature ”

**Subi George**

**Jawaharlal Nehru Centre for Advanced Scientific Research (JNCASR), India**

**Associate editor, *Chemical Science*** ([/journals-books-databases/about-journals/chemical-science/](https://journals-books-databases/about-journals/chemical-science/)).



## Gender diversity of RSC editorial board members

As a professional body and not-for-profit publisher, we want chemistry to be open to everyone – no matter their gender.

In 2019, we published a report about [gender bias in the chemical sciences](#) ([/new-perspectives/talent/gender-bias-in-publishing/](#)), which included in-depth gender analysis of the publication process in the chemical science community. As part of that report, we identified key areas for action, including increasing the transparency around diversity and inclusion, and the importance of reflecting the current gender balance in our research community.

We have also signed up to the United Nation's [Sustainable Development Goals](#) (<https://sdgs.un.org/>) (SDGs), aiming to accelerate progress and achieve our goals by 2030. Our commitment to inclusion and diversity contributes to the goal of gender equalities ([SDG 5](#) (<https://sdgs.un.org/goals/goal5>)).

We're committed to shaping things for the better, eliminating bias and driving change within the academic publishing industry. That's why we are sharing the most recent statistics about the gender diversity of our editorial board members.



- **Male 61%**
- **Female 37%**
- **Prefer not to say 2%**
- **Self-described 0%**

\*Percentages are based on data collected from individual journals and books before 28 September 2021. Data is held on the geographical location and employment of editorial board members through their affiliations.

“ I’m proud to contribute to Royal Society of Chemistry journals due to their scientific excellence, quality and gender inclusion ”

**Monica Lira-Cantu**

**Catalan Institute of Nanoscience and Nanotechnology, Spain**

**Associate editor (2019-2022), *Journal of Materials Chemistry C* ([/journals-books-databases/about-journals/journal-of-materials-chemistry-c/](https://journals-books-databases/about-journals/journal-of-materials-chemistry-c/)), and *Materials Advances* ([/journals-books-databases/about-journals/materials-advances/](https://journals-books-databases/about-journals/materials-advances/)).**



---

## Learn more about our editorial board members

Read about the scientific background, careers and experiences of the editorial board members on each of our journals.

Search by journal +

---

## Editorial board insights

Discover the most up-to-date highlights and resources from our editorial community.

Explore the latest highlights

[our-editorial-board-members/editorial-board-insights/](#)



# Share

## Not a member?

[Join us now \(/membership-and-community/join/\)](/membership-and-community/join/)




---

[Help \(/help-legal/help/\)](/journals-books-databases/) | 
 [Advertise \(/advertise/\)](/membership-and-locations-contacts/) | 
 © Royal Society of Chemistry 2023. Registered charity number 207890.

[Legal \(/help-legal/legal/\)](/help-legal/legal/) | 
 [Privacy \(/help-legal/legal/privacy/\)](/help-legal/legal/privacy/) | 
 [Accessibility \(/help-legal/legal/accessibility/\)](/help-legal/legal/accessibility/)

This website collects cookies to deliver a better user experience. See how this site uses [Cookies \(/cookies/\)](/cookies/).


[community/](/community/)





Cite this: *RSC Adv.*, 2018, 8, 931

# Incorporation of graphene oxide in polyethersulfone mixed matrix membranes to enhance hemodialysis membrane performance†

M. Z. Fahmi, \*<sup>ab</sup> M. Wathoniyyah,<sup>a</sup> M. Khasanah,<sup>a</sup> Y. Rahardjo,<sup>a</sup> S. Wafiroh<sup>a</sup> and Abdulloh<sup>a</sup>

Graphene is a carbon allotrope and possesses numerous unique properties which make it an attractive material in many areas. In this work, graphene oxide (GO) was added to polyethersulfone (PES) mixed matrix membranes (MMMs) to improve the performance of hemodialysis membranes. GO was synthesized from tartaric acid by pyrolysis with various temperatures of the pyrolysis and the membrane was fabricated by a casting solution method followed by its characterization. The MMMs showed better mechanical properties than pristine PES with a tensile stress and tensile strain value of 5.55 MPa and 0.039 m, respectively. The hydrophilicity of the membranes which is in agreement with contact angle values showed that GO addition increased the hydrophilicity of the MMMs. Hence, the solute flux and clearance of creatinine gave values of 2.94 L m<sup>-2</sup> h<sup>-1</sup> and 78.3%, respectively. Cross sectional images and the surface morphology were also recorded using scanning electron microscopy (SEM). The resulting data proved that the modified MMMs can be a potential material for hemodialysis.

Received 12th October 2017  
Accepted 8th December 2017

DOI: 10.1039/c7ra11247e

rsc.li/rsc-advances

## Introduction

Chronic kidney disease (CKD) is a world-wide disease and was ranked 17<sup>th</sup> as the leading cause of death globally based on a study by the Global Burden of Disease (GBD) in 2015.<sup>1</sup> The Kidney Disease Quality Outcome Initiative (KDQOI) defined CKD as kidney damage or a Glomerulus Filtration Rate (GFR) < 60 mL min<sup>-1</sup>/1.73 m<sup>2</sup> for 3 months or more regardless of the cause.<sup>2</sup> Kidney damage will occur with increasing concentration of metabolic waste, such as creatinine and urea, and the effects will lead to other harmful health conditions.<sup>3</sup> Therefore, CKD patients require supportive therapies to prolong life such as hemodialysis (HD), peritoneal dialysis, or kidney transplant.<sup>4</sup> The main component of hemodialysis treatment is the membrane which is used as a barrier to remove metabolic waste from blood.<sup>5</sup> Hemodialysis membranes have been made from various polymers. Among several polymers proposed, polyethersulfone (PES) is widely used for blood purification due to its outstanding hydrolytic, oxidative, and thermal stability, and excellent mechanical properties.<sup>6</sup> Application of PES as the main material of the membrane has also been considered due to its excellent properties for improving the performance and the fouling resistance of the membrane.<sup>7</sup> However, the

hydrophobic nature of PES may cause membrane fouling which is mainly caused by the deposition of solutes, such as blood protein, that adsorb rapidly on the surface of the membrane or into the membrane pores.<sup>8</sup> Therefore, modification of PES is an important way to reduce this problem. Several hydrophilic modifications have been reported and revealed that this method can be applied to reduce the membrane's fouling and prevent the decreasing of the membrane's flux.<sup>9–11</sup> The common modification method is by adding some hydrophilic polymer,<sup>12</sup> but the result is not satisfactory because of the poor tolerance of the polymeric membrane to high temperature, oxidants, strong acid or alkaline reagents, and organic solvent.<sup>13</sup> Recently, the development of membranes has been shifted to mixed matrix membranes (MMMs) that combine adsorption and diffusion in one membrane to remove uremic solutes in blood. MMMs have been reported to have adsorptive particles that are incorporated into the polymer matrix.<sup>14</sup>

Meanwhile, carbon based materials will always be an interesting area for researchers due to their unique properties, both chemical and physical. Several advantageous properties, such as high thermal/chemical stability, electrical conductivity, surface area, and good corrosion resistance, are attributed to carbon materials. Carbon materials provide a wide variety of structures and textures ranging from 0D to 3D, such as C-dots and graphene quantum dots (0D), carbon nanotubes (1D), graphene and graphene oxide (2D), and graphite (3D).<sup>15</sup> These carbon materials are easy to process and are compatible with other materials due to their diverse surface chemical properties, making these materials ideal to be used in composites.

<sup>a</sup>Department of Chemistry, Universitas Airlangga, Surabaya 61115, Indonesia. E-mail: m.zakki.fahmi@fst.unair.ac.id; Fax: +62-31-5922427; Tel: +62-31-5922427

<sup>b</sup>Institute of Tropical Disease, Airlangga University, Surabaya 61115, Indonesia

† Electronic supplementary information (ESI) available. See DOI: 10.1039/c7ra11247e

Some studies have been done using carbon materials in MMMs as the adsorptive material for hemodialysis membranes, such as activated carbon<sup>16</sup> and multi walled carbon nanotubes.<sup>12</sup> Another carbon material that has attracted much research in the field of separation membranes is graphene. Graphene is a 2D material that consists of a single layer of carbon arranged in an  $sp^2$  bonded aromatic structure. Graphene material has been confirmed as an excellent material to be used in the separation field due to its atomic thickness, high mechanical strength, and chemical inertness.<sup>13</sup> The oxidized form of graphene is called graphene oxide (GO). In our previous work, GO has been successfully synthesized through pyrolyzing an appropriate precursor, such as citric acid.<sup>17,18</sup> The direct pyrolyzing process of citric acid will obtain QGDs by tuning the degree of carbonization, while prolonged heating results in the complete carbonization of citric acid and GO is obtained.<sup>19</sup>

Incorporation of carbon nanotubes (CNTs) as an analogue of graphene with a PES matrix to improve the hydrophilicity of the membrane was proposed by Vatanpour *et al.*, in which some functional hydrophilic groups of the CNTs can attract the desired hydrophilic groups such as those of creatinine and uremic toxins and also be used as determining factors for the enhancement of the anti-fouling properties of the membrane.<sup>20</sup> On the other hand, the hydrophobic nature of CNTs will provide hydrophobic sites to the membrane. Based on this report, application of GO to develop a method was based on the interactions in carbon nanotubes which have similar properties to those of GO.<sup>12</sup> However, further improvement in the application of PES and GO for creatinine dialysis, the main part of the hemodialysis process, has not been achieved yet. In the present study, a PES/GO membrane was fabricated using the phase inversion method. The mechanical strength, functional group assessment, and hydrophilicity are important data that need to be improved as well as the morphology of the membrane. Finally, simulation of creatinine dialysis was performed using a dead-end system to examine the PES/GO membrane's ability to remove creatinine, and it was compared with that of pristine PES to determine the influence of adding graphene into a PES matrix.

## Experimental section

### Materials

Tartaric acid (99.5%), sodium hydroxide (NaOH, 97%), picric acid (99%), and creatinine (98%) were purchased from Sigma-Aldrich (Milwaukee, USA). Polyethersulfone (PES) used as the membrane raw material was purchased from Raza Traders (Mumbai, India) and dimethylformamide (DMF) used as solvent was purchased from Merck & Co., Inc. (New Jersey, USA). All chemicals were used directly without further purification.

### Preparation of GO

GO was prepared from tartaric acid by the pyrolysis method. Experimentally, about five grams of tartaric acid was put in a glass container with a nitrogen flow and heated at various temperatures (270 °C, 300 °C, 350 °C, and 400 °C) with a heating rate of 30 °C per minute and the adjusted temperature was

maintained for 3 hours. The resulting powder obtained from pyrolysis was GO and it was further characterized using Raman spectrometer and X-ray diffraction instruments.

### Fabrication of the PES/GO membrane

GO particles (0.5 mg) were dispersed in 100 mL of DMF as solvent with vigorous stirring for a minute, followed by ultrasonication treatment (20 kHz, 130 W) to make the GO particles disperse completely. About 17 mg of PES was added and dissolved in the solution under continuous stirring until the polymer completely dissolved. This PES/GO solution was used for fabrication using the phase inversion method, where this dope solution was cast onto clean glass and rolled to form a flat-sheet membrane with a diameter of around 250  $\mu\text{m}$ . The resulting membrane was subsequently put into a water containing coagulation bath for the coagulation process of the membrane without any evaporation process. The membrane was further stored in DI water for 24 hours and dried in between two pieces of filter paper at room temperature for 24 hours.

### Characterization of the membrane

FTIR analysis of the membrane was performed using a KBr pellet. The membrane was cut into small pieces and after being mashed with KBr was then analysed. For the tensile strength measurements, the membranes were cut into  $6 \times 1$  cm sized pieces and their mechanical strength measured using an Autograph. The hydrophilic test was based on the contact angle of the membrane. The measurement was done using a contact angle goniometer. A 0.1  $\mu\text{L}$  amount of water was dropped onto the membrane surface using a syringe. The contact angle was then measured per minute for 5 minutes. The morphology of the membranes was observed using a Scanning Electron Microscopy instrument.

### Cross flow system

The clearance of creatinine was observed to evaluate the performance of the membranes. Dialysis simulation was performed using a cross-flow system. The feed solution was streamed through the membranes. One hundred ppm of creatinine solution (dissolved in water) was prepared to mimic blood solution. This solution was passed through the membranes (retentate) and recirculated back to the feed reservoir. Meanwhile, solution that passed through the membranes was called the permeate and further observed. The membrane area used in the cross-flow system was 14.62  $\text{cm}^2$ . Before starting the experiment, the membranes were compacted to avoid the compaction effect of membranes.

The concentration of the creatinine solution was adjusted based on a calibration curve and was measured using a colorimetric assay by first making a complex of creatinine with picric acid as a chromogenic agent following a previous study with some modification.<sup>21</sup> Experimentally, about 2 mL of creatinine solution was mixed with 1 mL of picric acid in 1 M NaOH solution (26 mM) and 1 mL of pure water with stirring for 15 min. UV-vis spectroscopy was carried out to analyse the creatinine–picric acid complex absorbance at a wavelength of

510 nm, and the creatinine concentration in the sample was calculated according to a standard curve.

The flux and creatinine clearance parameters were determined to evaluate the performance of the proposed membranes. The creatinine clearance during the dialysis simulation was determined using eqn (1).

$$SC(\%) = \frac{C_0 - C_t}{C_0} \times 100 \quad (1)$$

where SC (%) represents the solute clearance, and  $C_0$  and  $C_t$  are the creatinine concentration at an initial time before passing through the membrane and 40 minutes after passing through the membrane, respectively. Meanwhile, the flux was determined using eqn (2).

$$J = \frac{V}{A \times t} \quad (2)$$

where  $J$  is the flux of the solute ( $\text{L m}^{-2} \text{h}^{-1}$ ),  $V$  is the volume of the diffuse solute (L),  $A$  is the diffusion area ( $\text{m}^{-2}$ ), and  $t$  is the diffusion time (hour).


## Results and discussion

### Synthesis and characterization of GO

GO was prepared from tartaric acid as the main precursor by the pyrolysis method. The precursor was heated at various

temperatures. Close to its melting point, tartaric acid will be decomposed and release water molecules.<sup>22</sup> This condition accelerates tartaric acid molecules to experience self-assembly once they have followed the condensation process to form six membered rings. This structure will grow and form the GO structure. A possible mechanism of GO formation from pyrolysis of tartaric acid is described in Scheme 1.

GO resulting from the pyrolysis process was further confirmed by Raman spectroscopy and X-ray diffraction (XRD) patterns. The diffraction pattern of GO shows two particularly broad peaks in the ranges  $10\text{--}11^\circ$  and  $23\text{--}25^\circ$  (Fig. 1). The broad peak that appeared at a  $2\theta$  of around  $20\text{--}30^\circ$  confirms a graphene structure with a  $d$ -spacing of about  $3 \text{ \AA}$ .<sup>17</sup> Meanwhile, formation of GO was confirmed by a peak which appeared at a  $2\theta$  of around  $10\text{--}20^\circ$  and a  $d$ -spacing value of around  $7 \text{ \AA}$ .<sup>20</sup> Compared with the  $d$  spacing of the graphene peaks, the left shifting of the GO  $d$ -spacing indicates a crystallinity change due to insertion of oxygen-containing groups attached at the edge and basal planes of GO. Interestingly, after improving the thermal variation for the synthesis process and assessing the peak intensities (Table 1), the GO area was observed to decrease following an increase of the synthesis temperature. The intensity ratio between the GO and graphene peaks significantly reveals that the graphene area should be much improved at high temperature. This phenomenon indicates a higher change

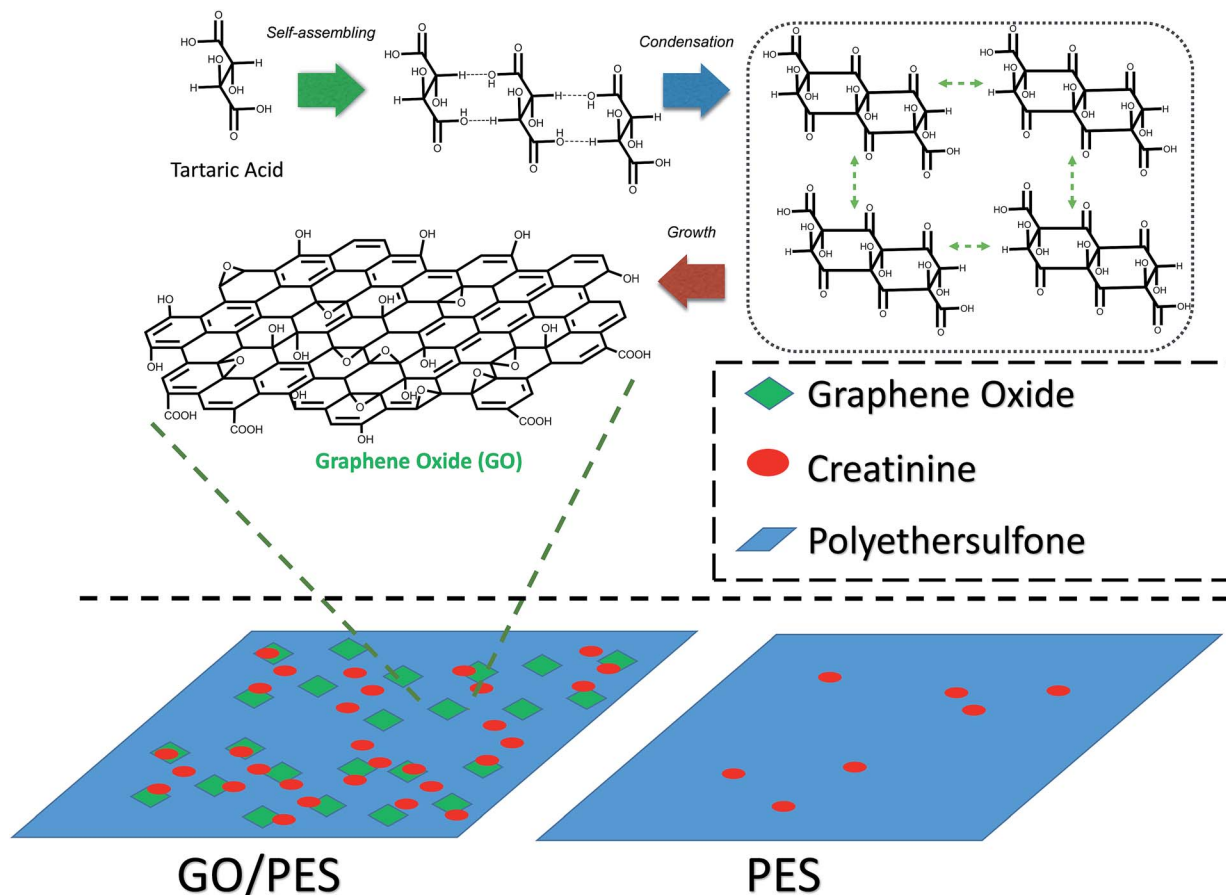

Scheme 1 Schematic mechanism of GO formation.

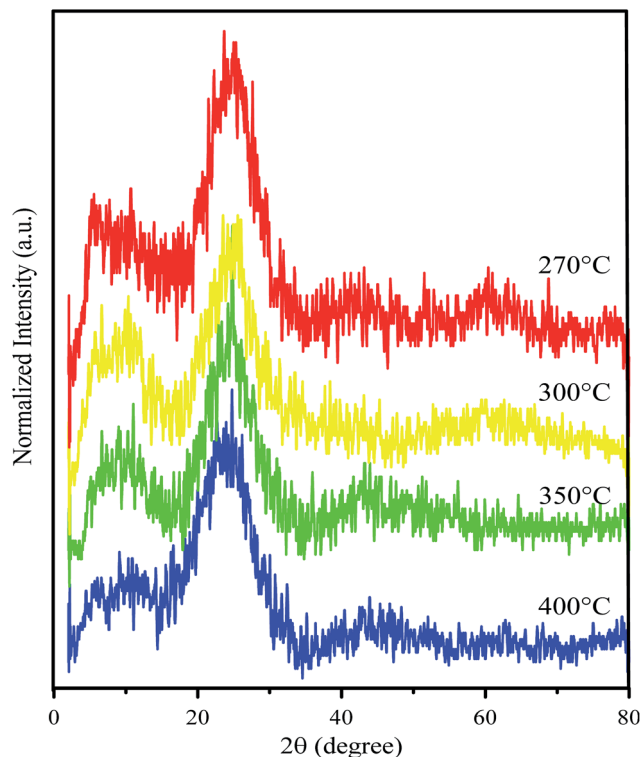


Fig. 1 XRD patterns of the as prepared GO after being synthesized at various temperatures.

Table 1 XRD intensity data of GO synthesized at various temperatures

Temperature of pyrolysis (°C)	Symbol	Peak GO/ intensity 1 (a.u.)	Peak graphene/ intensity 2 (a.u.)	Intensity ratio ( $I_2/I_1$ )
270	GO270	161	225	1.398
300	GO300	131	204	1.557
350	GO350	105	165	1.571
400	GO400	82	149	1.817

in the crystallinity of GO due to the removal of oxygen-containing groups in the formed graphene.

The particular features of the graphene material in the Raman spectra are the bands which appeared at  $1350\text{ cm}^{-1}$  and  $1580\text{ cm}^{-1}$  corresponding to the D band and G band, respectively. The G peak which appeared corresponds to the bond stretching between all of the  $\text{sp}^2$  atoms in both the chains and ring. The D bands indicate  $\text{sp}^3$ -hybridized carbon atoms.<sup>23</sup> Fig. 2 shows Raman spectra of GO synthesized at various temperatures. At  $270\text{ }^\circ\text{C}$ , the spectrum does not show either G or D bands and only shows a significant peak at  $\sim 1100\text{ cm}^{-1}$  for C–O–C asymmetric bond stretching. This result shows that no GO or graphene was formed. Meanwhile, GO synthesized at higher temperature ( $300\text{ }^\circ\text{C}$ ,  $350\text{ }^\circ\text{C}$ , and  $400\text{ }^\circ\text{C}$ ) showed both G and D bands. However, the D band for the  $300\text{ }^\circ\text{C}$ -synthesized GO was poor in intensity. A peak at  $\sim 1100\text{ cm}^{-1}$  also appeared for all of the synthesized GO, but the poor intensity for

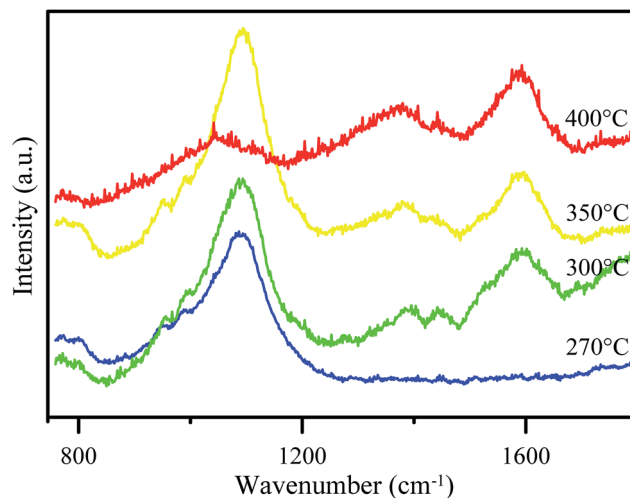


Fig. 2 Raman spectra of GO after being synthesized at various temperatures.

the  $400\text{ }^\circ\text{C}$ -synthesized GO reveals an increasing graphene area instead of GO area.

The observed peaks in the Raman spectra indicate that the material which was synthesized in this research formed disordered graphene, which is also called graphene oxide (GO). This is because D bands only appear in disordered graphene.<sup>24</sup> Besides, the peak at  $\sim 1100\text{ cm}^{-1}$  showed that some epoxy groups are formed in the GO structure which can increase its hydrophilicity. Therefore, it can be used to increase the hydrophilicity of PES membranes.

## Characterization of membranes

### Functional groups of the GO-membrane

The formation of GO from tartaric acid was confirmed by the decreasing intensity of the OH and carboxyl groups of tartaric acid (Fig. 3). This showed that the OH and carboxyl groups have been reduced to form GO.<sup>21</sup> FTIR spectra of GO revealed the presence of an OH stretching vibration ( $3630\text{ cm}^{-1}$ ) and stretching vibrations for C=O ( $1718\text{ cm}^{-1}$ ) and C–OH ( $1219\text{ cm}^{-1}$ ) suggesting that oxygen containing groups are introduced into graphene oxide. This showed the disordered structure of GO. The figure also shows the FTIR spectra of the fabricated membrane. The result for both membranes of PES and PES/GO showed peaks for S=O asymmetric stretching at  $1153.43\text{ cm}^{-1}$ , C–O–C ether at  $1107.14\text{ cm}^{-1}$ , and C–H stretching at  $2924.09\text{ cm}^{-1}$ . Both membranes also showed peaks for C–C aromatic bonds but with different wavenumbers. The PES membranes showed a peak at  $1579.70\text{ cm}^{-1}$  and the PES/GO membranes showed a peak at  $1577.77\text{ cm}^{-1}$ . Aromatic C–H also appeared at a different wavenumber,  $3068.75\text{ cm}^{-1}$  and  $3070.68\text{ cm}^{-1}$  for the PES and PES/GO membranes, respectively. The shift of the wavenumber for the aromatic group indicates the possibility of electrostatic bonding occurring. The possible bonding of PES/GO is  $\pi$ – $\pi$  stacking due to the shift in the aromatic stretching frequencies. Meanwhile, incorporation of



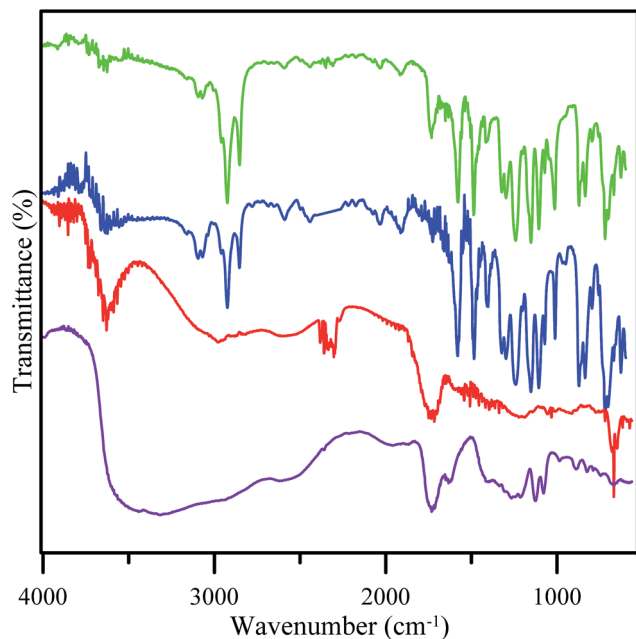


Fig. 3 FTIR spectra of tartaric acid (purple line), GO350 (red line), the PES membrane (blue line), and the PES/GO membrane (green line).

GO in the PES/GO membranes is confirmed by the peaks for OH at  $3630.03\text{ cm}^{-1}$  and carboxylic C=O at  $1732.08\text{ cm}^{-1}$  which were observed for both the GO and PES/GO membranes. Based on these XRD and FTIR data, GO350 was chosen mainly for the next process due to the presence of hydrophilic sites (such as hydroxyl or oxide sites) and hydrophobic sites (the graphene like structure) which were important for the design process.

### Membrane morphology

The cross sectional morphologies of the PES/GO and PES membranes were analysed using SEM, as seen in Fig. 4. All of the membranes have an asymmetric structure composed of a dense skin layer and a compact spongy layer. The skin layer is responsible for permeation and solute rejection whereas the sponge sub-layer acts as the mechanical support of the membranes.<sup>12</sup> The surface morphologies of the prepared membranes are shown in Fig. 5. The results show that the PES membranes had some inner pores whilst the PES/GO350 membranes showed a smooth surface. This can be related to the carbon-based structures of GO and the PES polymer, which caused the good dispersion of GO in the membrane matrix. This also showed that no agglomeration of nanoparticles was detected on the membrane surface confirming the uniform dispersion of GO into the membranes. Further EDX data (ESI, Fig. S1†) of the samples shown in Fig. 5 prove that the percentage of oxygen and carbon in PES/GO350 was higher than that in PES due to the addition of GO which consists of carbon and oxygen atoms. Beside these atoms, PES and PES/GO350 also contain sulphur atoms, where PES and PES/GO350 contain a sulphur percentage of 15.90% and 9.68%, respectively. The data also confirm that GO was uniformly dispersed in PES.

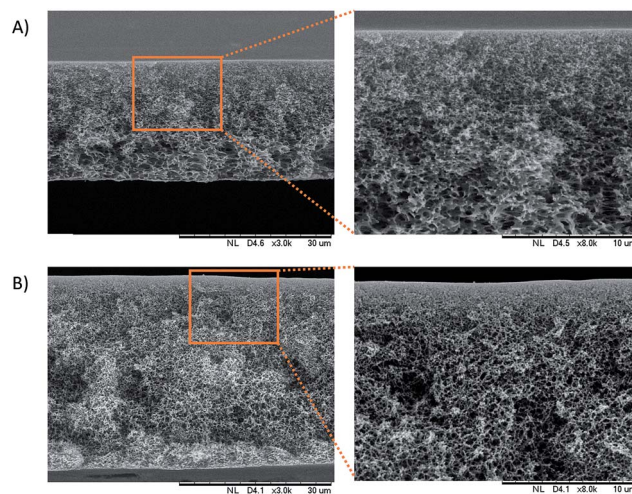


Fig. 4 Cross sectional image of (A) the PES membrane and (B) the PES/GO350 membrane. The figures on the right show a higher magnification of a particular area (brown square).

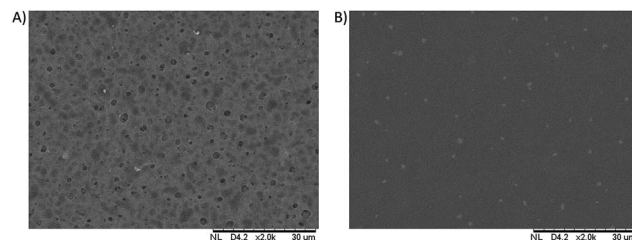


Fig. 5 Surface morphology of (A) the PES membrane and (B) the PES/GO350 membrane.

### Hydrophilicity evaluation

Surface hydrophilicity is one of the important attributes to adjust the performance of hemodialysis membranes. Hydrophilic properties in membranes are good for hemodialysis membranes due to the membranes attracting blood protein to adsorb on the membrane's surface and block the membrane pores.<sup>12</sup> The hydrophilicity of a membrane can be evaluated by the water contact angle of a drop on the surface of the membrane, where a low contact angle confirms high water absorption and means high hydrophilicity of the membrane.<sup>25</sup> Fig. 6 shows the contact angles of the PES and PES/GO350 membranes, and shows that the contact angle of each membrane decreased with time due to a high water solubility. However, the contact angle of the membrane decreased drastically with the addition of GO350 into the membranes (PES/GO350), indicating that the hydrophilicity of the membranes increased with the addition of GO. The water contact angle of the PES and PES/GO350 membranes started off as  $82.09^\circ$  (Fig. 6(B-i)) and  $64.71^\circ$  (Fig. 6(C-i)), respectively. These contact angles decreased gradually with increasing time. The increased hydrophilicity with the addition of GO is mainly due to polar functional groups, such as epoxy, hydroxyl, and carboxylic groups, which are attached to GO and allowed better attraction of water molecules.

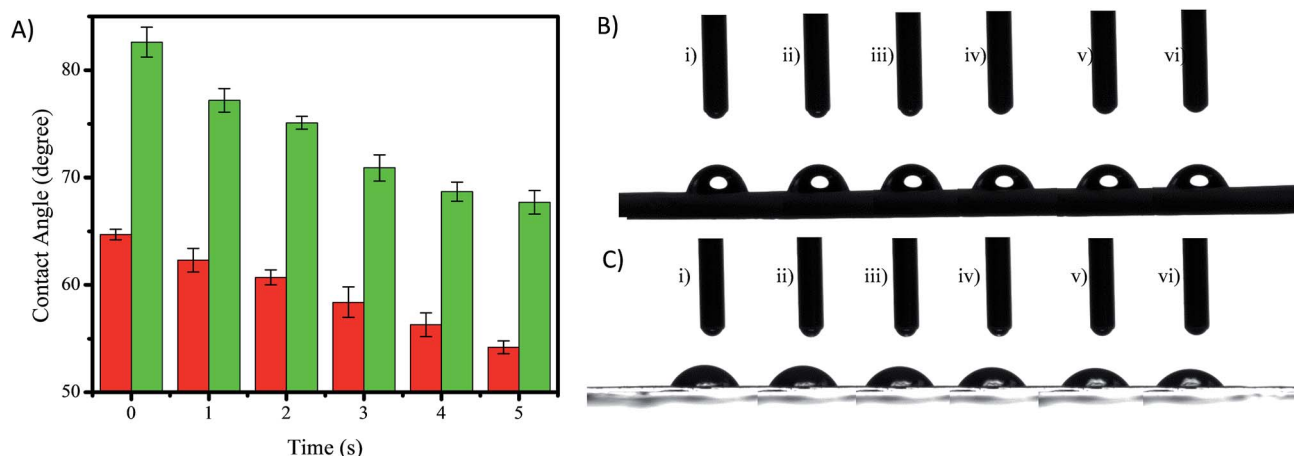


Fig. 6 (A) The water contact angle values of the PES (red bars) and PES/GO350 (green bars) membranes,  $n = 3$ . Photographs of a water drop on PES (B) and PES/GO (C); the symbols (i) to (vi) represent the time at 0, 1, 2, 3, 4, and 5 s, respectively. The initial contact angle of PES (B-i) and PES/GO300 (C-i) was  $82.09^\circ$  and  $64.71^\circ$ , respectively.

### Mechanical strength of the membranes

The mechanical strength of membranes also plays an important role in applying membranes because it represents their strength and compatibility for the hemodialysis process. The mechanical strength of membranes is expressed as the tensile stress and strain. The tensile stress and strain of the PES/GO350 membranes are 5.55 MPa and 0.039 m, respectively. Meanwhile, for unmodified PES they are 3.31 MPa and 0.033 m, respectively. The addition of GO350 into the membranes seems to improve the tensile stress of the membranes while not quite significantly improving the strain value. The Young's modulus of the PES and PES/GO350 membranes was  $10.2 \times 10^{-7}$  and  $16.9 \times 10^{-7}$  Pa, respectively. This result showed that the PES/GO350 membranes have better mechanical properties than the PES membranes. The results of the mechanical properties of the membranes are shown in Table 2.

### Dialysis performance of the PES and PES/GO350 membranes

Clearance of creatinine was determined to assess the performance of the proposed membranes. The dialysis performance was evaluated *via* the cross flow method for the flat sheet membranes. In this case, the membranes were cut into circle shapes. The membrane's performance was evaluated based on

Table 2 Mechanical properties of the fabricated membranes ( $\pm$ SD,  $n = 3$ )

Membranes	Stress (MPa)	Strain (%)	Young's modulus (MPa)
PES/GO270	$4.22 \pm 2.51$	$4.1 \pm 0.021$	$11.4 \pm 1.9$
PES/GO300	$3.23 \pm 7.01$	$4.2 \pm 0.013$	$8.1 \pm 2.7$
PES/GO350	$5.55 \pm 1.01$	$3.9 \pm 0.004$	$16.9 \pm 1.4$
PES/GO400	$6.25 \pm 2.23$	$3.1 \pm 0.005$	$20.8 \pm 3.5$
PES	$3.31 \pm 0.45$	$3.3 \pm 0.007$	$10.2 \pm 1.6$

the clearance of creatinine from a feed reservoir as shown in Table 3.

This table reveals that the solute flux of the PES/GO350 membranes is higher than that of the PES membranes, which can be related to increasing the membrane's hydrophilicity thus attracting polar molecules (such as creatinine) better. Meanwhile, the creatinine clearance value of the PES/GO350 membranes indicates a higher ability for creatinine removal compared to the PES membranes; therefore, the percentage of creatinine clearance in PES/GO350 was lower than that in PES itself. This is in good agreement with the oxygen-containing groups of GO forming hydrogen bonds with molecules of creatinine making it easier to pass through the membrane. This result indicates that addition of GO into the membranes improved the membrane's ability to remove creatinine molecules and it may be considered as a substitute material for hemodialysis membranes. Furthermore, comparison between PES/GO350 with the other GO membranes is also shown in Table 3. The data show that the increasing temperature for the synthesis of GO will decrease the flux. In general, addition of GO increases the flux of the membrane, with GO contributing its hydrophilic properties to the membrane. As mentioned for the Raman data above, however, the minimal hydrophilic regions on the higher temperature synthesised GO result in a lower flux value. In particular, the presence of hydrophobic regions on GO is also crucial for mediating the physical interactions between GO and PES.

Table 3 The results of the membrane's dialysis performance ( $\pm$ SD,  $n = 3$ )

Membranes	Flux ( $\text{L m}^{-2} \text{ h}^{-1}$ )	Solute clearance (%)
PES	$1.17 \pm 0.03$	$89.59 \pm 4.03$
PES/GO270	$3.11 \pm 0.02$	$90.22 \pm 5.12$
PES/GO300	$3.07 \pm 0.15$	$81.34 \pm 7.72$
PES/GO350	$2.94 \pm 0.02$	$78.30 \pm 1.21$
PES/GO400	$2.21 \pm 0.07$	$85.56 \pm 1.17$

## Conclusions

GO was successfully synthesized by a pyrolysis method and can be incorporated in PES MMMs, where in SEM images of the PES/GO membranes, GO particles were uniformly dispersed. Addition of GO into the membranes also improves the hydrophilicity and mechanical strength properties of the membranes. The dialysis performance of the PES/GO membranes indicated a better flux and solute clearance compared to those of the pure PES membranes. This result indicates that the PES/GO350 membranes could be considered as good candidates for hemodialysis membranes.

## Conflicts of interest

The authors declare there are no conflicts.

## Acknowledgements

The authors thank the Mandat Funding Program Universitas Airlangga under contract No. 597/UN3.14/LT/2017 and the Competence Research Program Ministry of Research, Technology and Higher Education, Republic of Indonesia for supporting this research under contract No. 1500/UN3.14/LT/2017.

## References

- 1 D. Collaborators, *Lancet*, 2016, **388**, 1459–1544.
- 2 A. S. Levey, K.-U. Eckardt, Y. Tsukamoto, A. Levin, J. Coresh, J. Rossert, D. D. E. Zeeuw, T. H. Hostetter, N. Lameire and G. Eknoyan, *Kidney Int.*, 2005, **67**, 2089–2100.
- 3 C. Nie, L. Ma, Y. Xia, C. He, J. Deng, L. Wang, C. Cheng, S. Sun and C. Zhao, *J. Membr. Sci.*, 2015, **475**, 455–468.
- 4 M. Irfan, A. Idris, N. Mohd, N. Farahah and M. Khairuddin, *J. Membr. Sci.*, 2014, **467**, 73–84.
- 5 G. J. Dahe, R. S. Teotia, S. S. Kadam and J. R. Bellare, *Biomaterials*, 2011, **32**, 352–365.
- 6 C. Zhao, J. Xue, F. Ran and S. Sun, *Prog. Mater. Sci.*, 2013, **58**, 76–150.
- 7 R. J. Gohari, E. Halakoo, W. Lau, M. Kassim, T. Matsuura and A. Ismail, *RSC Adv.*, 2014, **4**, 17587–17596.
- 8 J. Huang, K. Zhang, K. Wang, Z. Xie, B. Ladewig and H. Wang, *J. Membr. Sci.*, 2012, **423–424**, 362–370.
- 9 T. Forati, M. Atai, A. M. Rashidi, M. Imani and A. Behnamghader, *Polym. Adv. Technol.*, 2014, **25**, 322–328.
- 10 L. Zhu, H. Song, J. Wang and L. Xue, *Mater. Sci. Eng., C*, 2017, **74**, 159–166.
- 11 B. Ladewig and M. N. Z. Al-Shaeli, in *Fundamentals of Membrane Bioreactors*, Springer, 2017, pp. 87–129.
- 12 M. N. Z. Abidin, P. S. Goh, A. F. Ismail, M. H. D. Othman, H. Hasbullah, N. Said, S. H. S. A. Kadir, F. Kamal, M. S. Abdullah and B. C. Ng, *Mater. Sci. Eng., C*, 2016, **68**, 540–550.
- 13 L. Huang, M. Zhang, C. Li and G. Shi, *J. Phys. Chem. Lett.*, 2015, 1–40.
- 14 M. S. L. Tijink, J. Kooman, M. Wester, J. Sun, S. Saiful, J. A. Joles, Z. Borneman, M. Wessling and D. F. Stamatialis, *Blood Purif.*, 2014, **37**, 1–3.
- 15 A. K. Geim and K. S. Novoselov, *The rise of graphene*, Nature Publishing Group, 2007, vol. 6, pp. 183–191.
- 16 M. S. L. Tijink, M. Wester, J. Sun, A. Saris, L. A. M. Bolhuis-versteeg, S. Saiful, J. A. Joles, Z. Borneman, M. Wessling and D. F. Stamatialis, *Acta Biomater.*, 2012, **8**, 2279–2287.
- 17 M. Fahmi, W. Sukmayani, S. Q. Khairunisa, A. Witaningrum, D. Indriati, M. Matondang, J.-Y. Chang, T. Kotaki and M. Kameoka, *RSC Adv.*, 2016, **6**, 92996–93002.
- 18 M. Z. Fahmi, J.-K. Chen, C.-C. Huang, Y.-C. Ling and J.-Y. Chang, *J. Mater. Chem. B*, 2015, **3**, 5532–5543.
- 19 Z. Zhang, J. Zhang, N. Chen and L. Qu, *Energy Environ. Sci.*, 2012, **5**, 8869–8890.
- 20 S. Zinadini, V. Vatanpour, A. Akbar, M. Rahimi, Z. Rahimi and M. Kian, *Journal of Water Process Engineering*, 2015, **7**, 280–294.
- 21 J. L.-J. Zhu, F. Liu, X.-M. Yu, A.-L. Gao and L.-X. Xue, *J. Membr. Sci.*, 2015, **475**, 469–479.
- 22 P. Naik, P. Sutradhar and M. Saha, *J. Nanostruct. Chem.*, 2017, **7**, 85–89.
- 23 A. C. Ferrari, *Solid State Commun.*, 2007, **143**, 47–57.
- 24 I. Childres, L. A. Jauregui, W. Park, H. Cao and Y. P. Chen, *Raman spectroscopy of graphene and related materials*, Nova Science Publish, Indiana, 2013, pp. 1–20.
- 25 W. Haitao, Y. Liu, Z. Xuehui, Y. Tian and D. Qiyun, *Chin. J. Chem. Eng.*, 2009, **17**, 324–329.



Scimago Journal & Country Rank

Enter Journal Title, ISSN or Publisher Name

- Home
- Journal Rankings
- Country Rankings
- Viz Tools
- Help
- About Us


## Strengthen Your Writing

Ensure your message comes across as per confident every time.

# RSC Advances

### COUNTRY

United Kingdom

 Universities and research institutions in United Kingdom

 Media Ranking in United Kingdom

### SUBJECT AREA AND CATEGORY

Chemical Engineering  
Chemical Engineering (miscellaneous)

Chemistry  
Chemistry (miscellaneous)

### PUBLISHER

Royal Society of Chemistry

### H-INDEX

# 167



## Advances in Civil Eng. Papers

**PUBLICATION TYPE**

Journals

**ISSN**

20462069


**COVERAGE**

2011-2021

**INFORMATION**[Homepage](#)[How to publish in this journal](#)[Contact](#)**SCOPE**

RSC Advances papers should provide an insight that advances the chemistry field. Papers that contain little or no chemistry and are not considered to be of interest or relevance to the chemistry community are not within the scope of the journal. The criteria for publication are that the work must be high quality, well conducted and advance the development of the field.



Articles submitted to the journal are evaluated by our international team of associate editors and reviewers for the overall quality and accuracy of the science presented.

 Join the conversation about this journal


---

## Strengthen Your Writing

Ensure your message comes across as per confident every time.

 [Quartiles](#)  


[FIND SIMILAR JOURNALS](#) 

options 

# Belanja Hemat Awal Bulan

Periode 01 Maret - 31 Maret 2023

1  
**ACS Omega**

USA

**88%**  
similarity

2  
**Frontiers in Chemistry**

CHE

**81%**  
similarity

3  
**Chemical Research in Chinese Universities**

CHE

**77%**  
similarity

4  
**Progress in Chemistry**

CHN


**77%**  
similarity

5  
**Materials Today Chemistry**


GBR

**77%**  
similarity

SJR

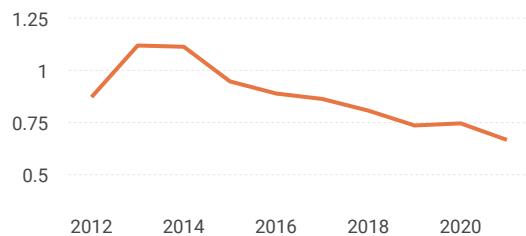

Total Documents

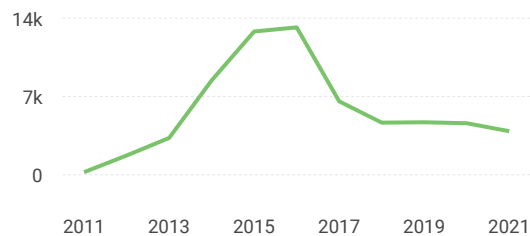

Citations per document

Total Cites






Self-Cites

External Cites per Doc

Cites per Doc

Cites per Doc

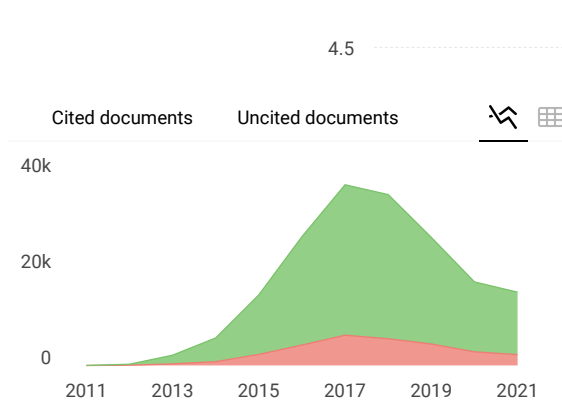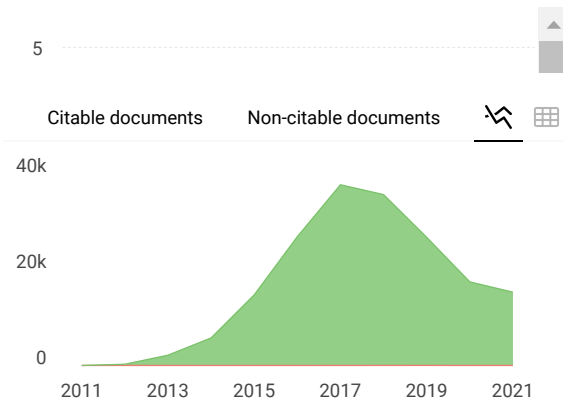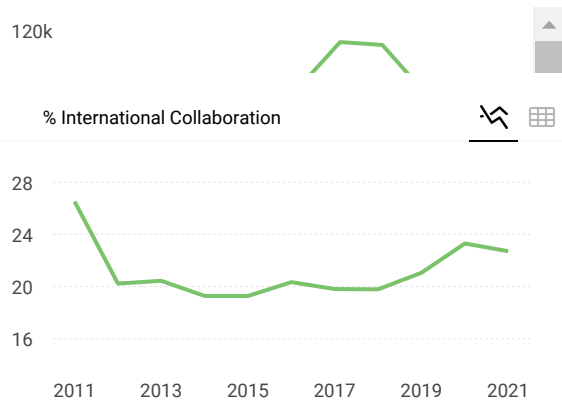

**RSC Advances**

Q1 Chemical Engineering (miscellaneous) best quartile

SJR 2021 0.67

powered by scimagojr.com


← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scima
```

**SCImago Graphica**

Explore, visually communicate and make sense of data with our **new data visualization tool.**

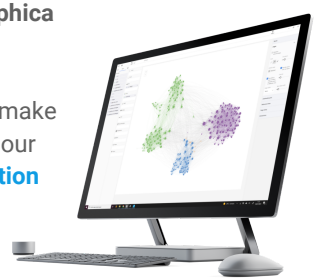

## Strengthen Your Writing Tone

Ensure your message comes across as personable, constructive, and confident every time.

Grammarly

[Learn M](#)

Metrics based on Scopus® data as of April 2022

D **Dr.Dina Abbas Ahmed** 4 weeks ago

Dear sir

I just want to ask, is this journal Q1 or Q2?

Best regards..

reply



**Melanie Ortiz** 4 weeks ago

SCImago Team

Dear Dr.Dina, thank you for contacting us. For every journal, the annual value of the SJR is integrated into the distribution of SJR values of all the subject categories to which the journal belongs. There are more than 300 subject categories. The position of each journal is different in any category and depends on the performance of the category, in general, and the journal, in particular. Best Regards, SCImago Team

C **Carla** 2 years ago

Dear Editor,

How is the journal ranking sorted? RSC Advances is categorized as Q2 in the chemistry area but it is ranked at #245 and even higher than other Q1 journals in this area?

Thank you.

reply



**Melanie Ortiz** 2 years ago

SCImago Team

Dear Carla, Thank you for contacting us.

As you probably already know, our data come from Scopus, they annually send us an update of the data. This update is sent to us around April / May every year.

The calculation of the indicators is performed with the copy of the Scopus database provided to us annually. However, the methodology used concerning the distribution by Quartiles by Scopus is different from the one used by SCImago.

For every journal, the annual value of the SJR is integrated into the distribution of SJR values of all the subject categories to which the journal belongs. There are more than 300 subject categories. The position of each journal is different in any category and depends on the performance of the category, in general, and the journal, in particular. The distribution by Quartiles cannot be considered over the journals' total amount within a Category. In the case of SCImago, the distribution has to be considered with the formula Highest-SJR minus Lowest-SJR divided into four.

Best Regards,  
SCImago Team

H **hamidreza** 2 years ago

Dear Sir/Madam

Why quality degree of RSC Advances (Q1, Q2, etc.) is not mentioned in this page?

thanks

reply



**Melanie Ortiz** 2 years ago

SCImago Team

Dear Hamidreza, thank you very much for your request. You can consult that information just above (see Quartiles). Best Regards, SCImago Team

R **reza** 2 years ago

Dear, Editor

I want to submit papaer

is only open access?

reply



**Melanie Ortiz** 2 years ago

SCImago Team

Dear Reza,

thank you for contacting us.

We are sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.

Unfortunately, we cannot help you with your request, we suggest you visit the journal's homepage (See submission/author guidelines) or contact the journal's editorial staff , so they could inform you more deeply.

Best Regards, SCImago Team

E **elsayed Ali elgazzar** 3 years ago

Dear, Editor

I want to submit papaer

reply

**Leave a comment**

Name

Email

(will not be published)

Saya bukan robot  
reCAPTCHA  
Privasi - Persyaratan

Submit

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

Developed by:



Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2022. Data Source: Scopus®

EST MODUS IN REBUS  
Horatio (Satire 1, 1, 106)



[Cookie settings](#)

[Cookie policy](#)

---