



ScienceDirect®

Optical Fiber Technology

Supports *open access*

4.8
CiteScore

2.8
Impact Factor

Submit your article

Guide for authors

Menu



Search in this journal

- › Aims and scope
- › Editorial board
- › Abstracting & indexing
- › Call for papers
- › News
- › Announcements
- › Highlighted Articles

› Article Selections

Editorial board by country/region

19 editors and editorial board members in 13 countries/regions

1 Italy (3)

2 France (2)

3 Portugal (2)

› See more editors by country/region

Editorial board

Editor-in-Chief



S. Wabnitz

Elettronica e Telecomunicazioni, Dipartimento di Ingegneria dell'Informazione, Sapienza Università di Roma, Via Eudossiana 18, 00184, Rome, Italy

[› View full biography](#)

Deputy Editor**G. Brambilla**

University of Southampton Optoelectronics Research Centre, University Road, SO17 1BJ, Southampton, United Kingdom

Associate Editors**A. Cucinotta**

University of Parma, Department of Engineering and Architecture, Parma, Italy

**V. Eramo**

University of Rome La Sapienza, Department of Information Engineering Electronics and Telecommunications, Rome, Italy

[› View full biography](#)

**F. Li**

Sun Yat-Sen University School of Electronics and Information Technology, Guangzhou, China

W. Lou

US Naval Research Laboratory, Optical Sciences Division, Washington, District of Columbia, United States of America

**C.A.F. Marques**

University of Aveiro, Department of Physics, Aveiro, Portugal

› [View full biography](#)

K. Nakajima

NTT Access Network Service Systems Laboratories, Ibaraki, Japan

**Anuj K. Sharma**

National Institute of Technology Delhi, New Delhi, India

[› View full biography](#)



M. Soto

Federico Santa Maria Technical University, Department of Electronic Engineering, Valparaíso, Chile

[› View full biography](#)



A. Sysoliatin

Russian Academy of Sciences, Moscow, Russia Russian Federation

[› View full biography](#)

A. Tonello

Limoges University, Limoges, France

Advisory Board

A. Barthelemy

Limoges University, Limoges, France

M. Chbat

Nokia Solutions and Networks Oy, ESPOO, Finland

J.-M. Delavaux

Keopsys Inc, Pittstown, United States of America

B. Desthieux

Nokia Networks Belgium, Antwerpen, Belgium

M.F. Ferreira

University of Aveiro, Aveiro, Portugal

R. Minasian

The University of Sydney, Sydney, Australia

D. Richardson

University of Southampton, Southampton, United Kingdom

Founding Editor

E. Desurvire

Nokia Networks France Villarceaux, Nozay, France

Honorary Editors

M. Nakazawa

Tohoku University Research Institute of Electrical Communication, Katahira 2-1-1, Aobaku, 980-8577, Sendai, Japan

E. Snitzer


Rutgers University Fiber Optics Materials Research Program, 607 Taylor Road, NJ 08854-8065, Piscataway, New Jersey, United States of America

All members of the Editorial Board have identified their affiliated institutions or organizations, along with the corresponding country or geographic region. Elsevier remains neutral with regard to any jurisdictional claims.



Copyright © 2023 Elsevier B.V. or its licensors or contributors.
ScienceDirect® is a registered trademark of Elsevier B.V.





Fiber bundle sensor for detection of formaldehyde concentration in fish

M. Yasin^{a,*}, N. Irawati^a, A.H. Zaidan^a, Kismiyati^b, A.T. Mukti^b, A. Soegianto^c, D.K.P. Rosalia^d, R.A. Wardani^d, M. Khasanah^e, H.J. Kbashi^f, A.M. Perego^{f,*}



^a Department of Physics, Faculty of Science and Technology, University of Airlangga, Surabaya 60115, Indonesia

^b Department of Fish Health Management and Aquaculture, Faculty of Fisheries and Marine, University of Airlangga, Surabaya 60115, Indonesia

^c Department of Biology, Faculty of Science and Technology, University of Airlangga, Surabaya 60115, Indonesia

^d Fisheries and Marine Biotechnology, Faculty of Fisheries and Marine, University of Airlangga, Surabaya, Indonesia

^e Department of Chemistry, Faculty of Science and Technology, University of Airlangga, Surabaya 60115, Indonesia

^f Aston Institute of Photonics Technologies, Aston University, Aston Triangle B4 7ET Birmingham, UK

ABSTRACT

We experimentally demonstrate an optical fiber bundle based sensor for measuring formaldehyde concentration in fish. We show that when contaminated fish samples are shined with red laser light with about 630 nm wavelength, the intensity of the backscattered radiation increases linearly with respect to the formaldehyde concentration. Our sensor has a simple architecture, it exhibits good sensitivity, linearity and stability and it has been tested for formaldehyde concentrations ranging from 3% to 21%. Our sensor allows non-destructive, on-site measurements and will have applications towards the development of all-optical cheap and portable sensors for detection of pollutants and toxic chemicals in the food industry and in the agriculture sector, being potentially suitable for measurements in the field.

1. Introduction

Detection of pollutants and of substances which are noxious for human health, both naturally present and surreptitiously added in the food production and supply chain, will be a major trend in optical sensing engineering in the present century. The demand for more sensitive, precise and selective sensors is motivated both by the scientific and technological challenge and by the increasingly higher standards in health and safety set by governmental policies for their citizens welfare. Especially in developing countries where quality and safety controls are currently looser, the risks of people contamination, with potentially deadly consequences, is higher and hence more efficient and practical techniques are required.

One of the current social problems related to food safety in developing countries (such as Malaysia, Indonesia, Thailand, Bangladesh to name just a few) is indeed the addition of formalin to the most various kinds of food including meat, fish and milk. Formalin is a solution of formaldehyde in water. Formaldehyde is a chemical substance tremendously noxious for human health being the cause of a variety of illnesses including different forms of cancer and leukemia [1,2]. It preserves the apparent look of food samples making them look healthy and fresh even when they are not any more so. For this reason, rogue traders use formalin to illegally sell rotten food, causing a two-fold damage to people: the eating of rotten food itself and the ingestion of the highly noxious formaldehyde.

While sensing of formaldehyde in the gaseous state, released from some construction materials for instance, has been studied quite extensively both using electronics and photonics based sensing platforms [3–5], the research on sensing of formaldehyde in food is much less developed. In such research area, while chemical methods based on chromatography [6,7] and mass spectroscopy [8] are accurate, they require sample treatment and long time measurements which should be performed in dedicated labs; photonics, potentially opens room for cheaper and portable sensing platforms with applications for measurements in the field.

Besides works on opto-chemical sensing [9–11], some recent experiments have demonstrated the possibility of detecting formaldehyde and measuring its concentration in liquids exploiting the emission of fluorescence [12–14] or based on Raman spectroscopy, especially surface enhanced Raman scattering enabled by metallic nanoparticles [15–18]. In an alternative approach, attenuated total internal reflection in bent plastic optical fibers has been used to measure concentration of formaldehyde in milk [19].

We present here experimental results obtained with a fiber bundle sensor, about the optical non-destructive, on-site measurement of formaldehyde concentration in fish using a very simple detection scheme based on collecting the intensity of laser light reflected from the food sample, fish in our particular study, contaminated by formaldehyde.

* Corresponding authors.

E-mail addresses: yasin@fst.unair.ac.id (M. Yasin), a.perego1@aston.ac.uk (A.M. Perego).

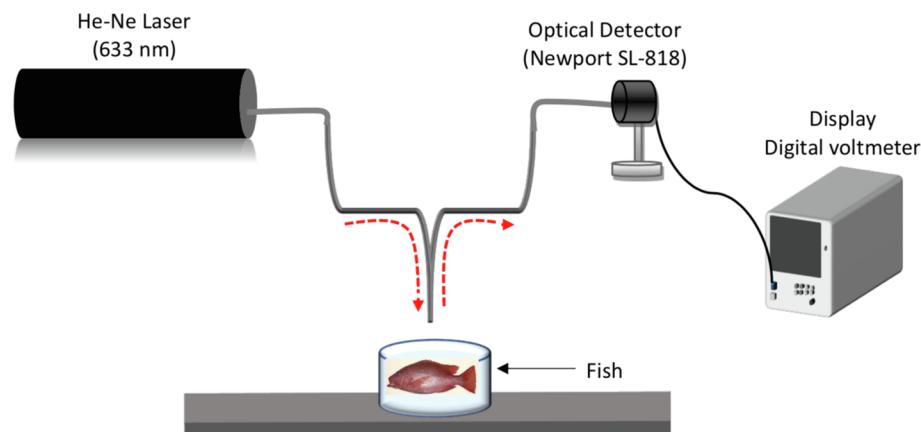


Fig. 1. Experimental setup.

2. Experimental setup

We used a Helium-Neon laser emitting in the visible at 633 nm to illuminate a fish sample through a 2 ports fiber bundle probe; the intensity of the light reflected from the fish was collected through the second port of the fiber bundle probe and measured by a Newport SL-818 optical detector connected to a digital voltmeter. The fiber bundle probe was attached to a support with micrometric movement, which allowed to finely control the distance between the probe and the sample. A schematic of the experimental setup is shown in Fig. 1.

3. Results

We have tested our sensor on two different kinds of fish popular in Indonesia: the snapper and the gouramis fish.

For each kind of fish we have immersed one entire fish in formalin for 1 h and then measured the output voltage of the detector by varying the distance of the fiber bundle probe from the fish, from 0 to 1 mm in steps of 50 μm . We have repeated the procedure for 8 different concentrations of formaldehyde in water ranging from 0% to 21% in steps of 3% (for each species 8 different fish samples have been used, one for each formaldehyde concentration). We observed that the detector output voltage increased proportionally to the formaldehyde concentration due to an enhanced backscattering caused by formaldehyde.

As one could expect, the voltage response decreases instead with

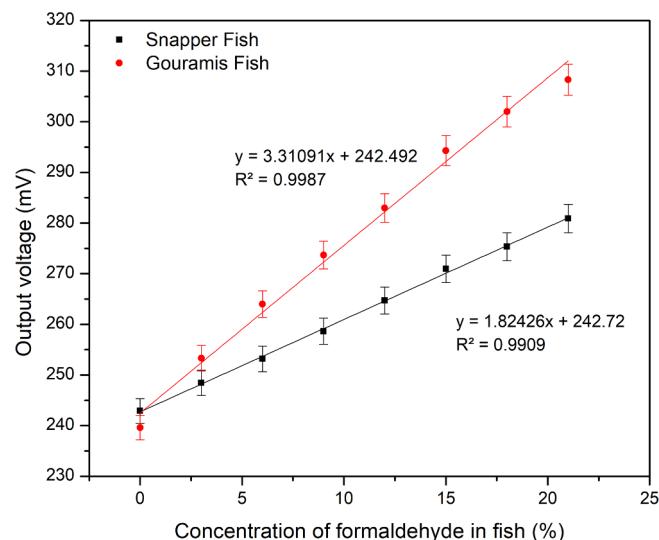


Fig. 3. Linearity of the sensor: output voltage versus formaldehyde concentration at zero probe-sample displacement for both snapper and gouramis fish (see legend). Dots represent averages over 10 different realizations of the experiment, while error bars represent the corresponding standard deviations. Results of linear fits are reported close the respective data sets.

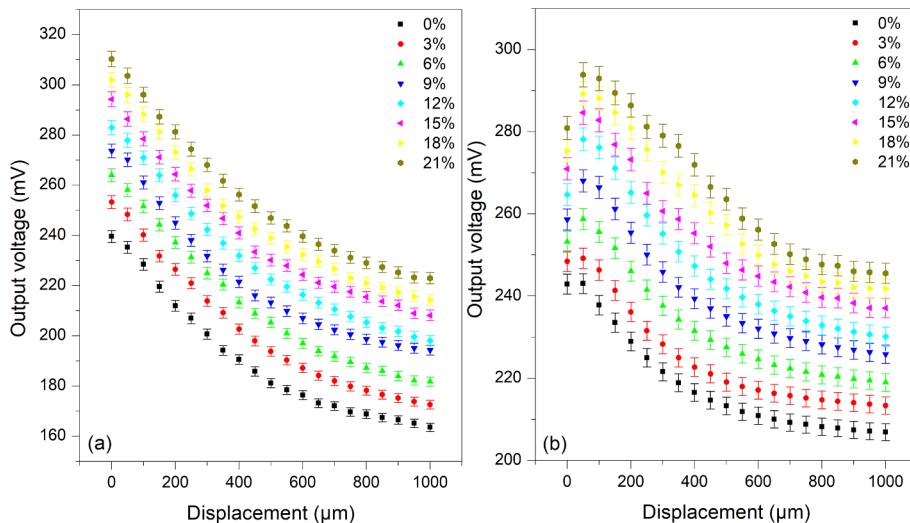


Fig. 2. The sensor output voltage is plotted versus the displacement between fiber bundle probe and fish sample for the snapper fish in (a) and for the gouramis fish in (b). Note that 0 displacement corresponds to the probe being in touch with the sample. Dots represent average over 10 realizations of the experiment, while error bars represent standard deviations.

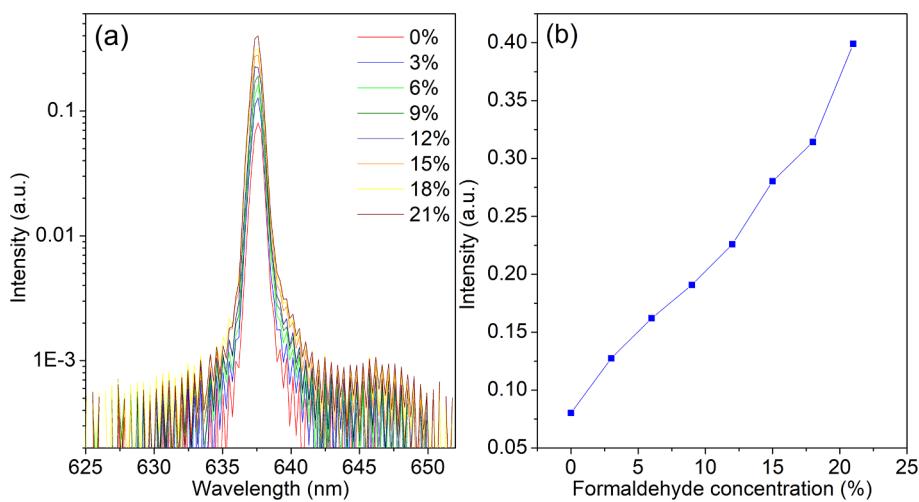


Fig. 4. The reflected light spectrum for various formaldehyde concentrations (see legend) exhibits an increase of the peak for higher concentrations (a). In (b) the intensity at the peak of the spectrum for various concentrations is plotted, the continuous line represents a guide for the eyes. The y-axes are in arbitrary units.

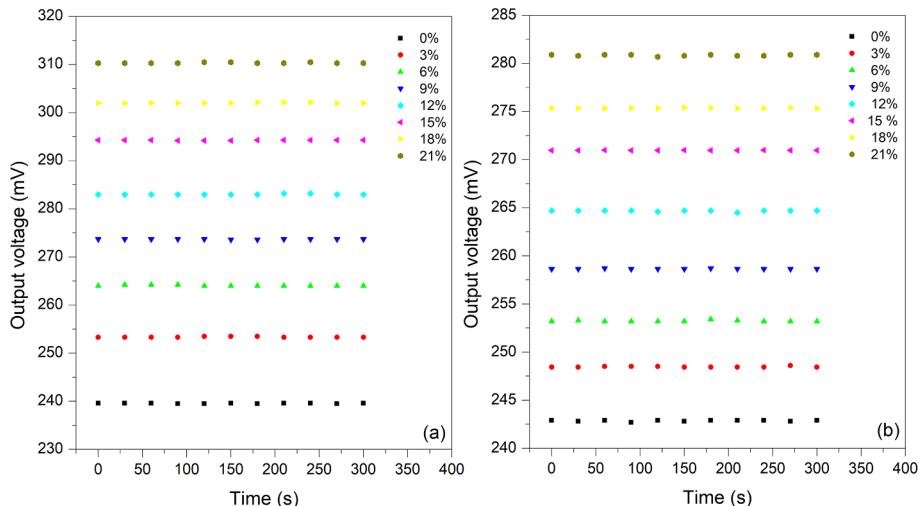


Fig. 5. Sensor stability: the output voltage is plotted versus time for various formaldehyde concentrations, in (a) the results are shown for the snapper while in (b) for the gouramis fish. The results are taken at zero probe-sample displacement.

increasing the distance between the fiber bundle probe and the sample, at fixed formaldehyde concentration, since more photons get lost through scattering on the fish surface (on the scales) when the probe is distant from the fish itself. This suggests that controlling the probe-sample distance is crucial for consistently comparing measurements of different concentrations. The detector output voltage has been shown for both snapper (Fig. 2(a)) and gouramis fish (Fig. 2(b)) by varying formaldehyde concentrations and probe-sample displacement.

The sensor response is linear with respect to the formaldehyde concentration for both fish samples tested, although the response for different fishes follows different slopes, this is possibly due to different constitution of the two fishes skins. The results are summarized in Fig. 3 where the detector voltage is plotted versus concentration for both fishes at zero displacement of the probe with respect to the sample.

We believe that the increase of reflected optical power for increasing formaldehyde concentration is due to a reduced absorption of red light by the water present in the formalin solution. Indeed increasing formaldehyde concentration in the formalin solution is associated to a decrease of water concentration in the solution itself with a consequent reduction of the absorption.

For consistency, we performed further measurements in order to confirm that the increased concentration of formaldehyde in the formalin solution is indeed responsible for stronger reflection in general

and hence to validate the general working principle of our sensor.

We put formalin solution in a transparent glass cuvette and shined the cuvette with a red laser emitting around 637 nm. We measured the spectrum of the reflected radiation for various formaldehyde concentrations by using a Thorlabs CCS200 - Compact Spectrometer with < 2 nm spectral accuracy. By keeping the laser emission power fixed, we indeed observed that more light was reflected for higher formaldehyde concentration. The results of the spectral measurements for various formaldehyde concentrations are plotted in Fig. 4. These findings supports the results shown in Fig. 2.

Our sensor also proves to be very stable. The sensor stability for various formaldehyde concentrations is illustrated in Fig. 5 where we show how the sensor output voltage is stationary in time at fixed concentration.

Table 1
Summary of the sensor features.

Sensor feature	Snapper fish	Gouramis fish
Sensitivity (mV/concentration)	1.82	3.31
Linearity (%)	99.89	99.87
Tested range (%)	3–21	3–21
Resolution (%)	0.036	0.031

The sensor features including sensitivity, linearity dynamic range and resolution (defined as the standard deviation of the output voltage variation in time, as depicted in Fig. 5, divided by the sensitivity) are summarized in the following Table 1.

We have furthermore verified that moving the target fish in the x-y plane, at fixed distance from the fiber bundle probe, does not affect the sensor response.

4. Conclusions

In conclusion, we have proposed a novel fiber bundle based sensor to measure the concentration of formaldehyde in fish measuring the reflection of laser light. We observed that the intensity of reflected light increases proportionally to the formaldehyde concentration. The sensor is very stable and responds linearly to the formaldehyde concentration present on the fish surface. Our sensing technique is simple, low cost, it could be applied to detect, in a non invasive and non destructive way, formaldehyde concentration in different food samples, including milk and meat for instance, and it has furthermore the potential to be developed in the future towards a portable device suitable for applications in the field. Future works will include the study of the sensor performances depending on the laser wavelength and also its development towards selectivity in order to identify formaldehyde even in presence of other additional chemicals.

Acknowledgments

The authors acknowledge Prof. S. K. Turitsyn, Dr. A. Gbadebo and Dr. V. Dvoyrin for discussion and support. This work was supported in part by the British Council through Newton-Fund project No. 62292, in part by the Indonesian Government (Fundamental Research Grant, 2019) and by Tahir Professorship Program of the University of Airlangga.

References

- [1] Report of the European Chemicals Agency: https://echa.europa.eu/documents/10162/13641/annex_xv_report_formaldehyde_en.pdf/58be2f0a-7ca7-264d-a594-da5051a1c74b.
- [2] Report of the United States Environmental Protection Agency: <https://www.epa.gov>.
- [3] T. Salthammer, S. Mentese, R. Marutzky, Formaldehyde in the indoor environment, *Chem. Rev.* 110 (2010) 2536–2572.
- [4] Po-Ren Chung, Chun-Ta Tzeng, Ming-Tsun Ke, Chia-Yen Lee, Formaldehyde gas sensors: a review, *Sensors* 13 (2013) 4468–4484.
- [5] A. Alloucha, M. Guglielmino, P. Bernhardt, C.A. Serrab, S. Le Calvéa, Transportable, fast and high sensitive near real-time analyzers: Formaldehyde detection, *Sens. Actuat. B* 181 (2013) 551–558.
- [6] T. Yeh, T. Lin, C. Chen, H. Wen, Analysis of free and bound formaldehyde in squid and squid products by gas chromatography and mass spectrometry, *J. Food Drug Anal.* 21 (2013) 190–197.
- [7] P. Wahed, Md.A. Razzaq, S. Dharmapuri, M. Corrales, Determination of formaldehyde in food and feed by an in-house validated HPLC method, *Food Chem.* 202 (2016) 476–483.
- [8] A. De Souza et al., Use of mass spectrometry for the determination of formaldehyde in samples potentially toxic to humans: a brief review, in *Mass Spectrometry*, M. Aliofkhazraei Editor, IntechOpen, Jun. 2017, ch. 9, pp. 978, Available: <https://www.intechopen.com/books/mass-spectrometry>.
- [9] U.S. Aksath, L.S. Selvakumar, M.S. Thakur, Detection of formaldehyde in food samples by enhanced chemiluminescence, *Anal. Methods* 4 (2012) 699–704.
- [10] O. Bunkoeda, F. Davisc, P. Kanatharanaa, P. Thavarungkula, S.P.J. Higsonc, Sol-gel based sensor for selective formaldehyde determination, *Anal. Chim. Acta* 659 (2010) 251–257.
- [11] A.A. Gani, M. Yuwono, B. Kuswandi, Development of optical chemical sensor based on pararosaniline in sol-gel matrix for detection of formaldehyde in food samples, *Am. J. Anal. Chem.* 4 (2013) 661–667.
- [12] K. Wong, J. Deng, X. Wei, S. Shao, D. Xiang, M. Wong, Visual detection of formaldehyde by highly selective fluorophore labeling via gold(III) complex-mediated three-component coupling reaction, *Org. Biomol. Chem.* 13 (2015) 7408–7411.
- [13] A. Bi, S. Yang, M. Liu, X. Wang, W. Liao, Fluorescent probes and materials for detecting formaldehyde: from laboratory to indoor for environmental and health monitoring, *RSC Adv.* 7 (2017) 36421–36432.
- [14] W. Zhoua, H. Dongb, H. Yana, C. Shia, M. Yua, L. Weia, Z. Lia, HCHO-reactive molecule with dual-emission-enhancement property for quantitatively detecting HCHO in near 100% water solution, *Sens. Actuat. B* 209 (2015) 664–669.
- [15] W. Qu, L. Lu, L. Lin, A. Xu, A silver nanoparticle based surface enhanced resonance Raman scattering (SERRS) probe for the ultrasensitive and selective detection of formaldehyde, *Nanoscale* 4 (2012) 7358–7361.
- [16] P. Ma, F. Liang, D. Wang, Q. Yang, Y. Ding, Y. Yu, D. Gao, D. Song, X. Wang, Ultrasensitive determination of formaldehyde in environmental waters and food samples after derivatization and using silver nanoparticle assisted SERS, *Microchim. Acta* 182 (2015) 863–869.
- [17] V. Fauzia, N.C. Imawan, N.M.S. Narayani, A.E. Putri, A localized surface plasmon resonance enhanced dye-based biosensor for formaldehyde detection, *Sens. Actuat. B* 257 (2018) 1128–1133.
- [18] Z. Zhang, C. Zhao, Y. Ma, G. Li, Rapid analysis of trace volatile formaldehyde in aquatic products by derivatization reaction-based surface enhanced Raman spectroscopy, *Analyst* 139 (2014) 3614–3621.
- [19] G. Saracoglu, S.E. Hayber, Bent fiber sensor for preservative detection in milk, *Sensors* 16 (2016) 2094.

**SJR**

Scimago Journal & Country Rank

Enter Journal Title, ISSN or Publisher Name

[Home](#) [Journal Rankings](#) [Country Rankings](#) [Viz Tools](#) [Help](#) [About Us](#)

Shock & Vibration Open

Join Leading Researchers in the Field of Shock & Vibration
Paper With Us

Optical Fiber Technology

COUNTRY

SUBJECT AREA AND CATEGORY

PUBLISHER

H-INDEX

United States

 Universities and research institutions in United States

 Media Ranking in United States

Engineering

- Control and Systems Engineering
- Electrical and Electronic Engineering

Materials Science

- Electronic, Optical and Magnetic Materials

Physics and Astronomy

- Atomic and Molecular Physics, and Optics
- Instrumentation

Academic Press Inc.

H-INDEX

64



PUBLICATION TYPE	ISSN	COVERAGE	INFORMATION
Journals	10685200, 10959912	1970, 1994-2021	Homepage How to publish in this journal

Professional F Manufacturer

Make FTTx access the world is our n

Book Now




SCOPE

Innovations in optical fiber technology are revolutionizing world communications. Newly developed fiber amplifiers allow for direct transmission of high-speed signals over transcontinental distances without the need for electronic regeneration. Optical fibers find new applications in data processing. The impact of fiber materials, devices, and systems on communications in the coming decades will create an abundance of primary literature and the need for up-to-date reviews. Optical Fiber Technology: Materials, Devices, and Systems is a new cutting-edge journal designed to fill a need in this rapidly evolving field for speedy publication of regular length papers. Both theoretical and experimental papers on fiber materials, devices, and system performance evaluation and measurements are eligible, with emphasis on practical applications.

 Join the conversation about this journal

Strengthen Your Writing

Ensure your message comes across as per
confident every time.





[FIND SIMILAR JOURNALS](#) ?options ⋮

Strengthen Your Writing




Ensure your message comes across clearly and confidently every time.

1 Fiber and Integrated Optics GBR	2 IEEE Photonics Technology Letters USA	3 Journal of Lightwave Technology USA	4 IEEE Photonics Journal USA	5 Optics Communications NLD
89% similarity	86% similarity	86% similarity	84% similarity	76% similarity

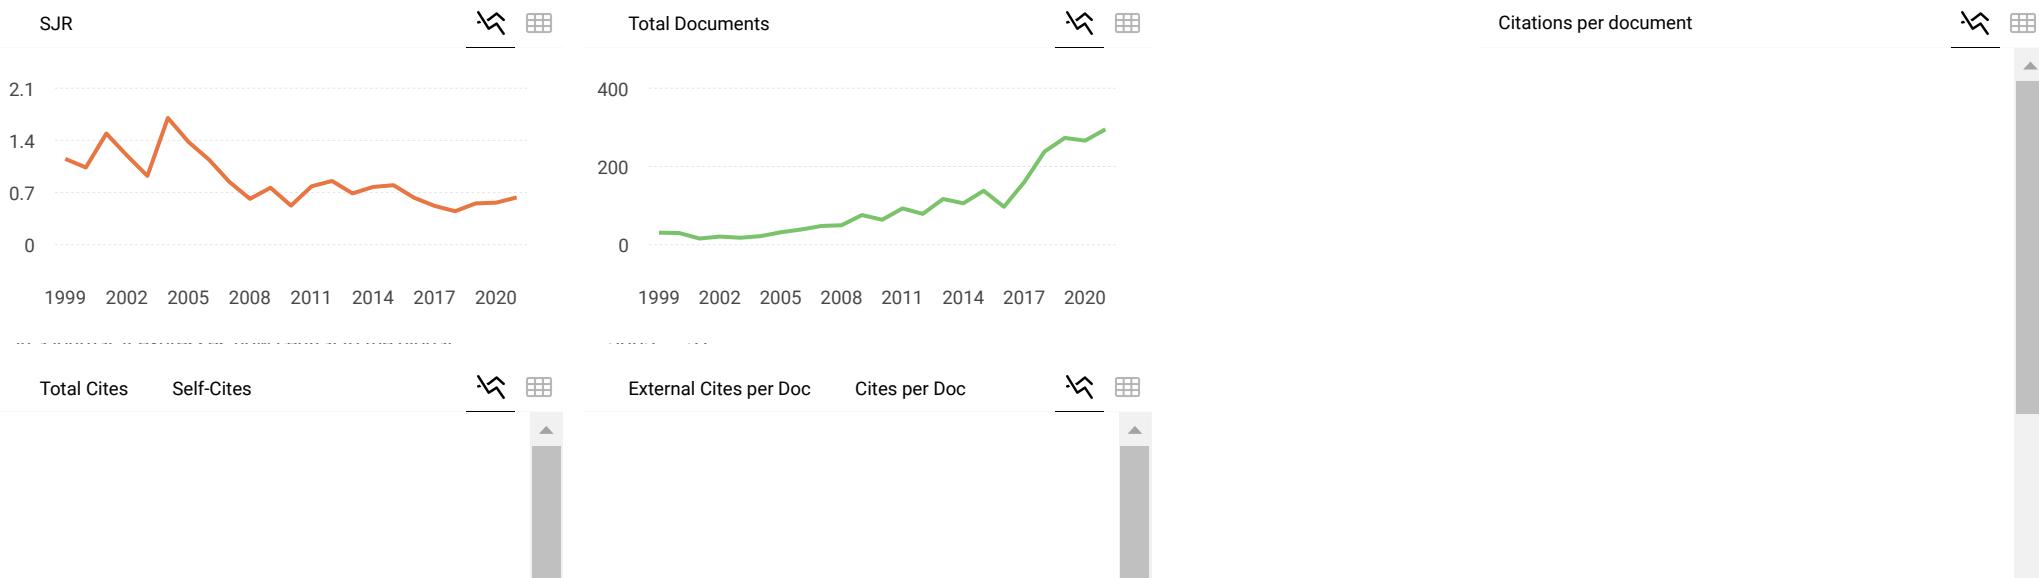

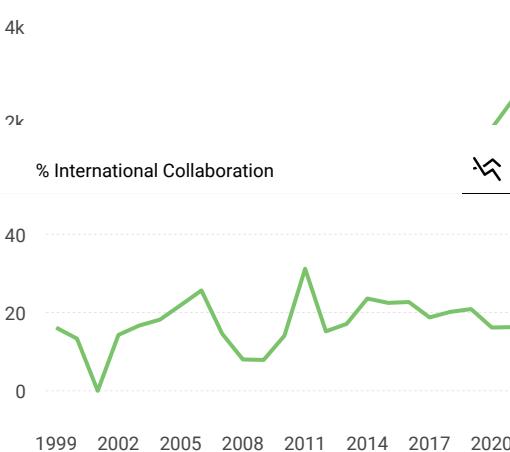

Optical Fiber Technology

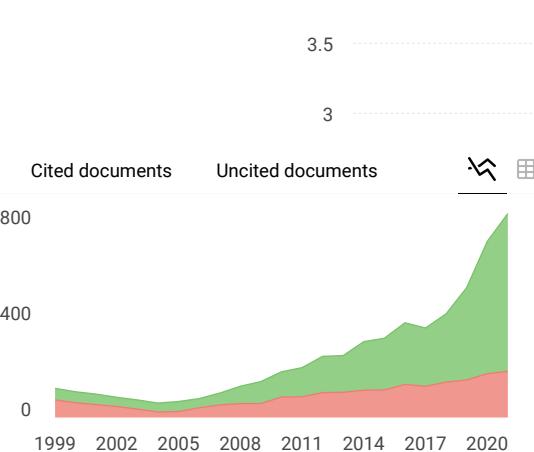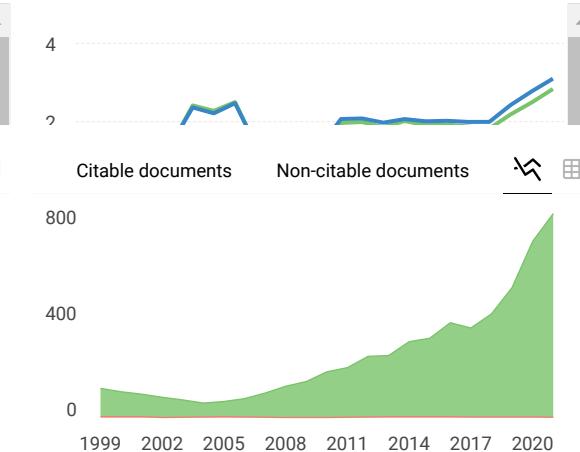

← Show this widget in your own website


Just copy the code below and paste within your html code:

```
<a href="https://www.scimagojr.com/j...>
```



Scimago Graphica

Explore, visually communicate and make sense of data with our [new data visualization tool](#).



Strengthen Your Writing Tone

Ensure your message comes across as personable, constructive, and confident every time.

[Grammarly](#)
[Learn M](#)

Metrics based on Scopus® data as of April 2022

Leave a comment

Name

Email

(will not be published)

Saya bukan robot

reCAPTCHA
Privasi - Persyaratan

Submit

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

Developed by:



Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2022. Data Source: Scopus®

EST MODUS IN REBUS
Horatio (Satire 1.1.106)

[Cookie settings](#)

[Cookie policy](#)