

# Formaldehyde sensing using micro-loop resonator

*by* Miratul Khasanah

---

**Submission date:** 03-Nov-2022 03:01PM (UTC+0800)

**Submission ID:** 1943230986

**File name:** \_Formaldehyde\_sensing\_using\_micro-loop\_2020\_AIP\_ICPIAM\_2019.pdf (543.8K)

**Word count:** 2297

**Character count:** 12953

# Formaldehyde sensing using micro-loop resonator

Cite as: AIP Conference Proceedings **2314**, 030004 (2020); <https://doi.org/10.1063/5.0034448>

Published Online: 09 December 2020

Mohd Hafiz Jali, Hazli Rafis Abdul Rahim, Sana Sulaiman Hamid, Md Ashadi Md Johari, Haziezol Helmi Mohd Yusof, Sulaiman Wadi Harun, M. Khasanah, and M. Yasin



View Online



Export Citation

## ARTICLES YOU MAY BE INTERESTED IN

[The study of argon plasma based on experimental and modeling diagnosis](#)

AIP Conference Proceedings **2314**, 030005 (2020); <https://doi.org/10.1063/5.0034271>

[A study of the influence of fuel additive on the ultrafine particle emission](#)

AIP Conference Proceedings **2314**, 020017 (2020); <https://doi.org/10.1063/5.0035892>



## Your Qubits. Measured.

Meet the next generation of quantum analyzers

- Readout for up to 64 qubits
- Operation at up to 8.5 GHz, mixer-calibration-free
- Signal optimization with minimal latency

Find out more



AIP Conference Proceedings **2314**, 030004 (2020); <https://doi.org/10.1063/5.0034448>

**2314**, 030004

© 2020 Author(s).

# Formaldehyde Sensing Using Micro-Loop Resonator

Mohd Hafiz Jali<sup>1,2</sup>, Hazli Rafis Abdul Rahim<sup>3</sup>, Sana Sulaiman Hamid<sup>1</sup>, Md Ashadi Md Johari<sup>1,4</sup>, Haziezol Helmi Mohd Yusof<sup>1,3</sup>, Sulaiman Wadi Harun<sup>1</sup>, M. Khasanah<sup>5</sup>, M. Yasin<sup>6</sup>

<sup>1</sup>Department of Electrical Engineering, Faculty of Engineering, University of Malaya, 50603 Kuala Lumpur, Malaysia

<sup>2</sup>Faculty of Electrical Engineering, Universiti Teknikal Malaysia Melaka, 76100 Melaka, Malaysia

<sup>3</sup>Faculty of Electronic and Computer Engineering, Universiti Teknikal Malaysia Melaka, 76100 Melaka, Malaysia

<sup>4</sup>Faculty of Engineering Technology, Universiti Teknikal Malaysia Melaka, 76100 Melaka, Malaysia

<sup>5</sup>Department of Chemistry, Faculty of Science and Technology, Airlangga University, Surabaya 60115, Indonesia

<sup>6</sup>Department of Physics, Faculty of Science and Technology, Airlangga University, Surabaya 60115, Indonesia

**Abstract.** Formaldehyde (CH<sub>2</sub>O) liquid sensor has been successfully fabricated using micro-loop resonator (MLR) based on whispering gallery mode (WGM) concept. An excellent sensing response towards formaldehyde liquid concentrations level ranging from 0% to 5% was observed. It is because of the changeable effective index and surface absorption phenomenon which lead to different light characteristic inside the MLR. The output power reduced linearly from -18.9 dBm to -36.2 dBm as the concentration increases. The sensitivity obtained was 3.6561 dBm/% with linearity of 99.1% and resolution of 0.0207%. The proposed sensor has simplicity, easy fabrication, better resolution and low cost. This application is essential in monitoring toxic gases and human health.

## INTRODUCTION

Formaldehyde (CH<sub>2</sub>O) is a carcinogenic volatile organic compound (VOC) which is used as a reagent for adhesives such as phenol-formaldehyde (PF) resins and urea-formaldehyde (UF) [1]. Besides, it also exhibit as a colourless and pungent-smelling gas. Formaldehyde as a multifunctional chemical has been widely used in various product manufacturing process such as plastics and resins. Unfortunately, it has also been illegitimately used as a preservative in vegetables, meat, fish and fruits to adjourn the spoilage process for their fresh appearance [2]. It lead to irritating health effect such as coughing, abdominal pain, vomiting, coma, renal injury, nausea, breathing difficulties and sneezing [3][4]. Concentrations level as low as 1 to 3 ppm levels would cause bad effect to the throat, eyes and nose and could cause fatality if concentrations levels more than 15 ppm. Thus, scientific research on formaldehyde detection has significant importance as environmental awareness increased [5].

Micro-loop resonator (MLR) comprises of a single mode fiber and directional coupler has been introduced in 1982. The overlapping portion is maintained by electrostatic and the Van der Waals force. The efficiency of the MLR could be achieved by ensuring slow variation during the tapering procedure [6]. MLR has superiority in terms of anti-interference, high resolution, quick response, stable measurement, stable chemical properties, large fractions of evanescent waves, low transmission loss, small size and easy preparation [7]. These prominent factors increase the sensing performances due to excellent interaction between the waveguides and surrounding analyte. Furthermore, whispering gallery mode (WGM) on the resonator cavity could improve the resonation quality based on Q-factor of the resonated wavelength.

Recently, numerous formaldehyde sensing technique has been introduced by researcher such as cataluminescence [8], spectroscopy [9], bio-sniffer [10] and chemiresistor [11]. These techniques required complicated manufacturing process, high cost, huge equipment, high-temperature operation and while for fiber coated nanomaterials required highly thorough handling attention during the synthesis process [12][13]. Therefore, a low cost, workable and

simple formaldehyde liquid sensing has been proposed in this work. It has been realized by manually twist the tapered fiber into a self-touching loop under an optical microscope and exposed it to the formaldehyde liquid.

## EXPERIMENTAL DETAILS AND SENSING MECHANISM

The waist diameter of single-mode fiber (SMF-28, Corning) was reduced into  $7\ \mu\text{m}$  by using a flame brushing technique. It has an approximately around 8 mm of tapering length [14]. The MLR was formed by manually circled the microfiber into a  $300\ \mu\text{m}$  self-touching loop. The coupling would occur when the electrostatic and Van Der Waals force causing surface attraction. It prevent the microfiber from straighten out due to the elastic forces [15]. The loop and waist diameter were identified using the microscope with magnification of 20X. Figure 1 depicted the sample of MLR utilized throughout the sensing experiment.

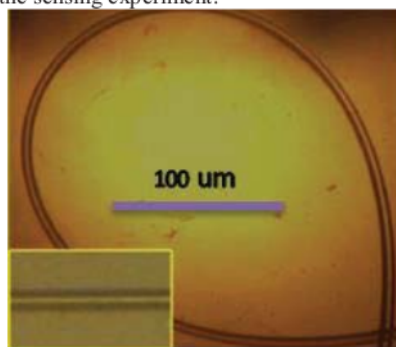


FIGURE 1. Image of the MLR captured using microscope

The MLR was positioned inside the controlled chamber (with dimension of  $22\ \text{x}\ 12\ \text{x}\ 12\ \text{cm}$ ) as illustrated in Fig. 2. An Amplified Spontaneous Emission (ASE) operating within a range of  $1530\text{nm} - 1560\text{nm}$  was launched to the input port of the MLR while the output port was connected to an optical spectrum analyzer (OSA) (Anritsu: MS9710C) for output power recording in dBm. Subsequently, the formaldehyde liquid was dropped evenly onto the MLR from concentration level 0% to 5% and the output power variation was monitored. The recorded data were collected few times so that the reproducibility of the proposed sensor can be ensured.

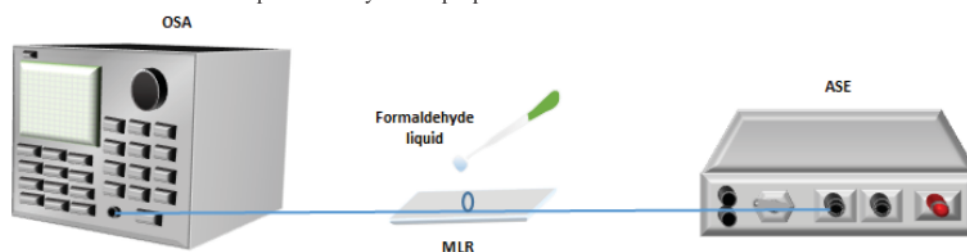


FIGURE 2. Setup for the sensing experiment

The amount of molecules, which were absorbed by the surface of MLR's cladding increases as concentration level is increased from 0% to 5%. This replaces the air medium with other analyte which increase the refractive index (RI) of the cladding. Refractive and evanescent field is correlated each other to determine the sensing performances. As the liquid concentrations increases, greater amount of evanescent wave appeared around the sensing region. This modulate the output light intensity with respect to the concentration level. More scattering losses occurrence were observed which lead to the increment of the transmission losses due to the surface absorption [16][17]. In case of MLR, reduction of light transmission become more significant due to resonator loss which was absent in the straight microfiber. This is because when the light oscillates in the MLR, it magnifies the loss and reduces the output power. Therefore, the reduction of transmitted light significantly changes output power, which in turn improves the sensitivity of the proposed sensor [18][19].

## RESULT AND DISCUSSION

WGM of the MLR in 5% concentrations of formaldehyde is shown in Fig. 4. The data was recorded in the wavelength range of 1550nm to 1560nm because the existence of sharp and clear resonance around the region. The resonating wavelength changes as the different formaldehyde liquid concentrations level increase. Sharp resonance dip can be observed for the 5% concentration level. A high quality resonator was found where the Q-factor was  $>10^5$  for all concentrations. The Q-factor was calculated based on the formula of  $\lambda/\Delta\lambda$ . Here,  $\lambda$  is the resonance wavelength while  $\Delta\lambda$  is a Full-Width-Half-Maximum (FWHM) linewidth of the resonant wavelength. It increased from  $7.774 \times 10^5$  to  $7.99 \times 10^5$  when the concentration level raised from 0% to 5% as shown in Fig. 5. The increasing Q-factor because resonating behavior would change if any change to outer environments of the MLR [7]. Any environment changes would varies the refractive index as the liquid level concentrations increase [5].

The trendline graph of the proposed sensor towards formaldehyde liquid concentrations level is shown in Fig. 6. The output power reduced proportionally as the concentrations level increase. As aforementioned, the RI of the MLR increases as the concentrations level increases due to the surface absorption of water molecules [18]. In addition, light oscillation phenomenon inside the MLR magnifies the loss and increase the sensitivity. Eventually the intensity of guided light inside the MLR steadily reduced as the liquid concentrations changed [19]. Thus, MLR produced more stable transmitted output power as compared to the SmF especially at 0%, 1% and 3% concentration level in previous work [20].

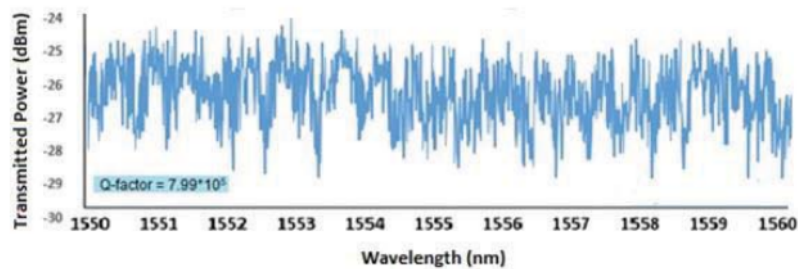


FIGURE 4. Whispering Gallery Mode (WGM) at 5% liquid concentrations level

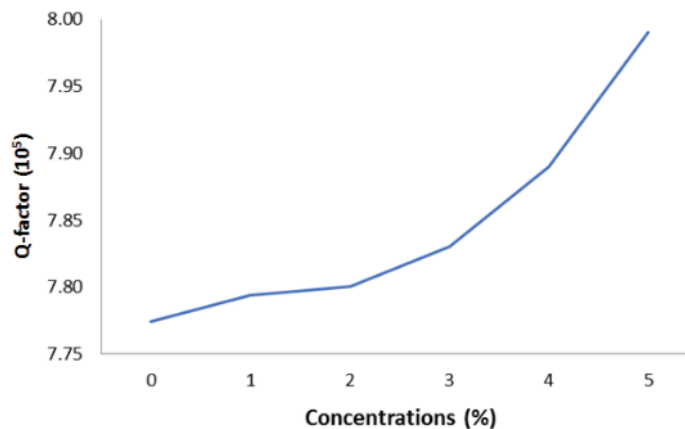


FIGURE 5. Q-factor when the formaldehyde liquid concentration increase

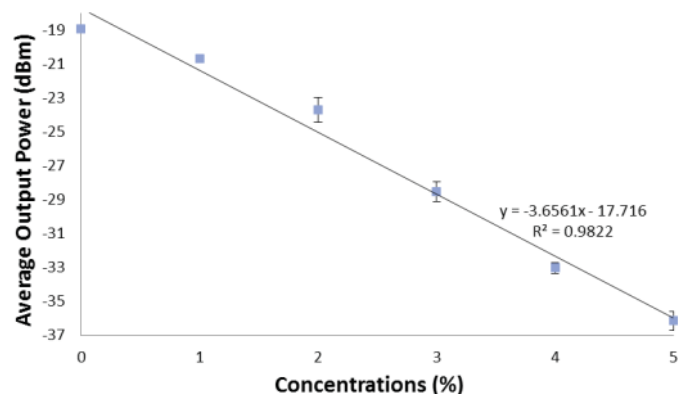


FIGURE 6. The trend line response towards formaldehyde liquid concentration level

Table 1 summarizes the sensing performances of the proposed sensor. The linearity and the sensitivity of the MLR is 99.1% and 3.6561 dBm/% respectively. A low standard deviation with 0.0757dBm leads to a small resolution of 0.0207%. It is also found that the Q-factor increases as the concentration level increases because of the variation of effective refractive index.

TABLE 1. Sensing performance of the formaldehyde liquid sensor

Parameters	MLR
Linearity (%)	99.10%
Sensitivity (dBm/%)	3.6561
Standard Deviation (dBm)	0.0757
Resolution (%)	0.0207

## CONCLUSION

A workable formaldehyde sensor has been demonstrated using micro-loop resonator. The MLR produce significant sensing performances in terms of sensitivity, linearity, resolution and standard deviation when exposed to the variation concentration levels of the formaldehyde liquid. This is due to the magnified power loss of the MLR which improve the sensing performance. It has benefit of reducing the hassle during the fabrication process due to the absent of coating procedure. The results show the better sensitivity was observed. Besides, it has numbers of advantages in term of sensitivity, simplicity, small size and low cost. This adhere a requirement in several applications such as human health and toxic gases monitoring.

## ACKNOWLEDGEMENTS

This work was supported by the Airlangga University Research Grant (2019).

## REFERENCES

1. L. Peng, Q. Zhao, D. Wang, J. Zhai, P. Wang, S. Pang, T. Xie, Chemical Ultraviolet-assisted gas sensing: A potential formaldehyde detection approach at room temperature based on zinc oxide nanorods, *Sensors and Actuators B* 136 (2009) 80–85. doi:10.1016/j.snb.2008.10.057.
2. L. Aksornneama, P. Kanatharana, P. Thavarungkula, C. Thammakhetta, 5-aminofluorescein doped polyvinyl alcohol film for the detection of formaldehyde in vegetables and seafood, *Analytical Methods* (2016) 1-10. doi:10.1039/C5AY02719E.



3. Z. Wang, C. Hou, Q. De, F. Gu, D. Han, One-step Synthesis of Co-doped In<sub>2</sub>O<sub>3</sub> Nanorods for High Response of Formaldehyde Sensor at Low Temperature, *ACS Sensors* (2018) 1-12. doi:10.1021/acssensors.7b00896.
4. C. Dong, X. Liu, B. Han, S. Deng, X. Xiao, Nonaqueous synthesis of Ag-functionalized In<sub>2</sub>O<sub>3</sub> / ZnO nanocomposites for highly sensitive formaldehyde sensor, *Sensors and Actuators B: Chemical*. 224 (2016) 193–200.
5. M. Debliquy, D. Lahem, C. Caucheteur, M. Nova, P. Initialis, Formaldehyde sensing with plasmonic near-infrared optical fiber grating sensors, *SPIE Photonics Europe*. 9899 (2016) 1–6. doi:10.1117/12.2227736.
6. M. Sumetsky, Y. Dulashko, J.M. Fini, A. Hale, D.J. DiGiovanni, The microfiber loop resonator: Theory, experiment, and application, *J. Light. Technol.* 24 (2006) 242–250. doi:10.1109/JLT.2005.861127.
7. L. Gai, J. Li, Y. Zhao, Preparation and application of microfiber resonant ring sensors: A review, *Opt. Laser Technol.* 89 (2017) 126–136. doi:10.1016/j.optlastec.2016.10.002.
8. C.L.Æ.P.H.Æ.C. Lin, MEMS-based formaldehyde gas sensor integrated with a micro-hotplate, *Microsystem Technology*, (2006) 893–898. doi:10.1007/s00542-006-0119-x.
9. P. Werle, K. Maurer, R. Kormann, R. Mu, Spectroscopic gas analyzers based on indium-phosphide , antimonide and lead-salt diode-lasers, *Spectrochimica Acta Part A*, 58 (2002) 2361–2372.
10. V. Bhatia, Temperature-insensitive and strain-insensitive long-period grating sensors for smart structures, *Opt. Eng.* 36 (1997) 1872. doi:10.1117/1.601379.
11. K. Mitsubayashi, G. Nishio, M. Sawai, T. Saito, H. Kudo, H. Saito, K. Otsuka, T. Noguier, J. Marty, A bio-sniffer stick with FALDH ( formaldehyde dehydrogenase ) for convenient analysis of gaseous formaldehyde, *Sensors and Actuators B*, 130 (2008) 32–37. doi:10.1016/j.snb.2007.07.086.
12. Q. Yao, H. Meng, W. Wang, H. Xue, R. Xiong, B. Huang, C. Tan, X. Huang, Simultaneous measurement of refractive index and temperature based on a core-offset Mach-Zehnder interferometer combined with a fiber Bragg grating, *Sensors Actuators, A Phys.* 209 (2014) 73–77. doi:10.1016/j.sna.2014.01.017.
13. M. Hafiz, H. Rafis, A. Rahim, A. Johari, S. Thokchom, S. Wadi, Sensors and Actuators A: Physical Applied microfiber evanescent wave on ZnO nanorods coated glass surface towards temperature sensing, *Sensors Actuators A. Phys.* 277 (2018) 103–111. doi:10.1016/j.sna.2018.05.003.
14. M. Sumetsky, Y. Dulashko, J.M. Fini, A. Hale, Optical microfiber loop resonator, *Appl. Phys. Lett.* 86 (2005) 1–3. doi:10.1063/1.1906317.
15. N. Irawati, H.A. Rahman, H. Ahmad, S.W. Harun, A PMMA microfiber loop resonator based humidity sensor with ZnO nanorods coating, *Meas. J. Int. Meas. Confed.* 99 (2017) 128–133. doi:10.1016/j.measurement.2016.12.021.
16. S. Azad, E. Sadeghi, R. Parvizi, A. Mazaheri, M. Yousefi, Sensitivity optimization of ZnO clad-modified optical fiber humidity sensor by means of tuning the optical fiber waist diameter, *Opt. Laser Technol.* 90 (2017) 96–101. doi:10.1016/j.optlastec.2016.11.005.
17. F.J. Arregui, Y. Liu, I.R. Matias, R.O. Claus, Optical fiber humidity sensor using a nano Fabry – Perot cavity formed by the ionic self-assembly method, *Sensors and Actuators B* (1999) 54–59.
18. Abdullah, M., Bidin, N., Krishnan, G., Ahmad, M.F.S., Yasin, M., Fiber Optic Radial Displacement Sensor-Based a Beam-Through Technique, *IEEE Sensors Journal* 16(2),7275084, pp. 306-311
19. Mohd Hafiz Jali, Hazli Rafis Abdul Rahim, Sana Sulaiman Hamid, Md Ashadi Md Joharia, Haziezol Helmi Mohd Yusof, Siddharth Thokchom, Sulaiman Wadi Harun, M. Khasanah, M. Yasin., Microfiber loop resonator for formaldehyde liquid sensing, *Optik* 196 (2019) 163174

# Formaldehyde sensing using micro-loop resonator

## ORIGINALITY REPORT

19%

SIMILARITY INDEX

11%

INTERNET SOURCES

18%

PUBLICATIONS

0%

STUDENT PAPERS

## PRIMARY SOURCES

- 1 Mohd Hafiz Jali, Hazli Rafis Abdul Rahim, Md Ashadi Md Joharia, Sana Sulaiman Hamid et al. "Optical characterization of different waist diameter on microfiber loop resonator humidity sensor", *Sensors and Actuators A: Physical*, 2018  
Publication 5%
- 2 Ersyzario Edo Yunata, Muhammad Ghufron. "The study of argon plasma based on experimental and modeling diagnosis", AIP Publishing, 2020  
Publication 2%
- 3 [expert.taylors.edu.my](http://expert.taylors.edu.my)  
Internet Source 2%
- 4 [biblio.ugent.be](http://biblio.ugent.be)  
Internet Source 1%
- 5 [www.mdpi.com](http://www.mdpi.com)  
Internet Source 1%
- 6 Mohd Hafiz Jali, Hazli Rafis Abdul Rahim, Md Ashadi Md Johari, Haziezol Helmi Mohd Yusof 1%



et al. "Humidity sensing using microfiber-ZnO nanorods coated glass structure", Optik, 2021

Publication

7

[www.nrcresearchpress.com](http://www.nrcresearchpress.com)

Internet Source

1 %

8

Arinto Yudi Ponco Wardoyo, Arif Budianto, Eko Teguh Purnomo Adi. "A study of the influence of fuel additive on the ultrafine particle emission", AIP Publishing, 2020

Publication

1 %

9

Liang Peng, Qidong Zhao, Dejun Wang, Jiali Zhai, Ping Wang, Shan Pang, Tengfeng Xie. "Ultraviolet-assisted gas sensing: A potential formaldehyde detection approach at room temperature based on zinc oxide nanorods", Sensors and Actuators B: Chemical, 2009

Publication

1 %

10

[pubs.rsc.org](http://pubs.rsc.org)

Internet Source

1 %

11

Shiwei Lin, Dongrong Li, Jian Wu, Xiaogan Li, S.A. Akbar. "A selective room temperature formaldehyde gas sensor using TiO<sub>2</sub> nanotube arrays", Sensors and Actuators B: Chemical, 2011

Publication

1 %

12

[www.osapublishing.org](http://www.osapublishing.org)

Internet Source

1 %

13

Chia-Yen Lee, Ping-Ru Hsieh, Che-Hsin Lin, Po-Cheng Chou, Lung-Ming Fu, Che-Ming Chiang. "MEMS-based formaldehyde gas sensor integrated with a micro-hotplate", *Microsystem Technologies*, 2006

Publication

<1 %

14

Farabi Temel. "One novel calix[4]arene based QCM sensor for sensitive, selective and high performance-sensing of formaldehyde at room temperature", *Talanta*, 2020

Publication

<1 %

15

María Guadalupe Pulido-Navarro, Ponciano Jorge Escamilla-Ambrosio, Sigifredo Marrujo-García, José Alfredo Álvarez-Chávez et al. "Temperature sensing through long period fiber gratings mechanically induced on tapered optical fibers", *Applied Optics*, 2017

Publication

<1 %

16

*Springer Series in Surface Sciences*, 2015.

Publication

<1 %

Exclude quotes Off

Exclude matches Off

Exclude bibliography On

# Formaldehyde sensing using micro-loop resonator

GRADEMARK REPORT

FINAL GRADE

**/0**

GENERAL COMMENTS

**Instructor**

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6