

The potential of methane gas production at Klotok Landfill Kediri City

by Sucipto Hariyanto

Submission date: 29-Jul-2020 05:36PM (UTC+0800)

Submission ID: 1363572084

File name: C28._The_potential_of_methane_gas_production_at_Klotok.pdf (756.2K)

Word count: 2883

Character count: 14310

PAPER · OPEN ACCESS

The potential of methane gas production at Klotok Landfill Kediri City

1
To cite this article: S Hariyanto *et al* 2019 *IOP Conf. Ser.: Earth Environ. Sci.* **245** 012020

View the [article online](#) for updates and enhancements.



IOP | ebooks™

Bringing you innovative digital publishing with leading voices to create your essential collection of books in STEM research.

Start exploring the collection - download the first chapter of every title for free.

The potential of methane gas production at Klotok Landfill Kediri City

S Hariyanto¹, H H P Fatima¹, N Citrasari¹, S Sendari² and MN Rasyidi¹

¹Department of Biology, Faculty of Science and Technology, Universitas Airlangga, Surabaya, Indonesia

²Electrical Engineering Department, Engineering Faculty, State University of Malang, Malang, Indonesia

Email: sucipto-h@fst.unair.ac.id

Abstract. This research aimed to determine CH₄ levels and its potential of usage in Klotok Landfill Kediri City. The measurement of CH₄ was performed at six points, three points at Klotok I and Klotok II Landfill in each cell. CH₄ was measured using portable gas detector with the MQ-04 type of gas sensor. The measurement of CH₄ was performed in seven times of observation in the morning and in the evening. The average of CH₄ levels at Klotok I Landfill were (1.8±0.71); (62.46±3.19); and (3.07±2.65) %Vol, respectively. The highest CH₄ levels at Klotok I Landfill was in Cell 2, which was almost similar to Klotok II Landfill. The CH₄ levels in each measurement points in the Klotok II Landfill were (63.21±2.61); (62.46±4.70); and (19.76±17) %Vol, respectively. The highest CH₄ levels at Klotok II Landfill was in Point 1. The CH₄ levels were affected by environmental condition in terms of soil temperature, soil moisture, and pH of soil, etc; the existence of methanogenic microorganisms, and the composition of waste in the landfill. A high CH₄ levels at Klotok Landfill Kediri City can be utilized as an alternative fuel for renewable energy source appropriate with the concept of green technology.

1. Introduction

CH₄ is one of the greenhouse gases that are 20 to 30 times stronger than CO₂ gas that causes global warming [1]. It is capable of absorbing and passing the radiation of the sun (shortwave) as well as reflecting the long wave radiation emitted on the surface of the earth; this results in an increase in temperature [2]. CH₄ is proven to be very hazardous if a landfill is not equipped with gas management facilities. Explosions in landfills may occur due to the chemical reaction between the air and CH₄ emitted by the waste. Those large tonnages of waste do not have a proper ventilation, causing the CH₄ gas to be trapped inside and keep increasing in volume as the gas becomes trapped and the volume continues to increase along with the garbage that keeps piling up. When large volumes of gas are in contact with the air, a flame will appear, followed by explosion [3][4].

CH₄ is one of the biogases that can be used as both fuel and alternative energy sources. It serves as an alternative energy sources for electric power generator, heat generator, and LPG gas that is widely utilized for domestic purposes. Burning 1 cubic foot (0.028 m³) of biogas produces heat energy of 10 Btu (2.25 kcal). This is equivalent to 6 kWh / m³ electrical energy or 0.61 l of gasoline; 0.58 l kerosene; 0.55 l diesel; 0.45 LPG (Natural Gas); 1.50 kg firewood; and 0.79l bio ethanol [5].

On average, every ton of solid waste generates 50 kg of CH₄ gas [2]. The waste that piled up in Klotok Landfill of Kediri City in 2014 reached 242.4 tons/day. This indicates that by 2014, 12,120 kg of CH₄ gas had been emitted by Klotok Landfill [6]. If not properly managed, the gas may possess a potential hazard to human health and environmental sustainability.



Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

Published under licence by IOP Publishing Ltd

Because of those factors, we investigated the potential of CH₄ gas that was formed from waste piles in Klotok II Landfill of Kediri City in order to determine the model of proper waste management that can be considered as environmentally friendly (green technology).

2. Research Methods

The CH₄ gas content measurement in this study used portable combination gas detector for seven times of measurement. This tool is designed and assembled by researchers at the Electrical Laboratory of State University of Malang. The portable combination gas detector catches CH₄ gas and temperature with the gas analogue sensor. The gas sensor of CH₄ and the temperature contained in this tool are MQ-04 or TGS2501.


The measurement of CH₄ gas content in Klotok I Landfill was performed at three points in each cell. Pipes were planted at depths of 1.5 m and 3 m. The pipe used in this research is a type of High Density Polyethylene (HDPE) PVC pipe with a diameter of 4 inches. The CH₄ gas level measurement in Klotok II Landfill was done at three points of CH₄ gas collection pipes. The main pipe was cut and then connected with other pipes. Data collection points of CH₄ gas in Klotok II Landfill were determined by the age of waste in each cell.


3. Result and Discussion

3.1 CH₄ Gas Content From Waste Pile At Klotok I Kediri

This research was conducted at Klotok Landfill Kediri with six points of data collection, three points in Klotok I Landfill and three points at Klotok II Landfill. The measurement of CH₄ gas was done conducted in a day; morning and evening. Klotok I Landfill is a passive zone of landfill that has been functioning since 1992. Klotok I Landfill consists of three cells with each having different ages, characteristics of piles, and area. Cell 1 is a cell that has the oldest waste piles of ± 13 years of age with an area of 0.83 ha. Cell 2 that is as wide as 0.62 ha contains dump that is approximately eight years old. The cell with the youngest waste pile at Klotok I Landfill Kediri is Cell 3, which is more or less five years of age with the width of 0.65 ha.

CH₄ gas is still produced in Cell 1. This is due to the decomposition process of waste (organic material) by microbes (bacteria) at a depth of 3 m, contrary to the depth of 1.5 m which has no CH₄ gas. The time required by the (methanogenic) bacteria to form CH₄ in degradation is longer than aerobic bacteria and facultative anaerobic bacteria [10]. The condition that exists in this cell revealed that there were many pipes that collected CH₄ gas, indicating that there was a previous harvest. This indicates that there is a new waste piling process in Cell 1, causing no production of CH₄ gas at a depth of 1.5 m.

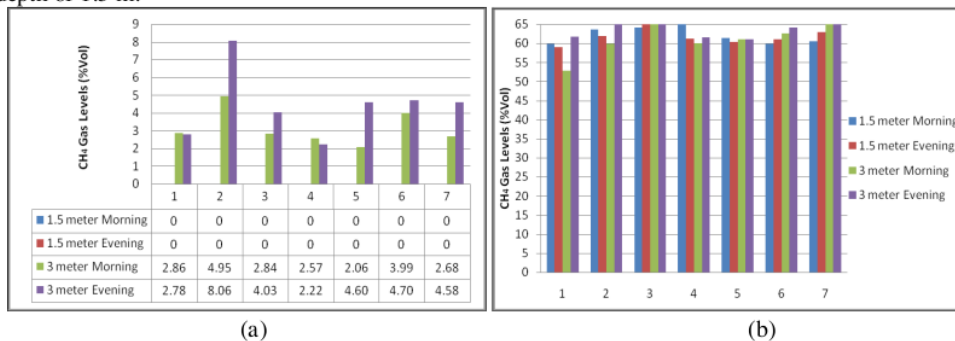

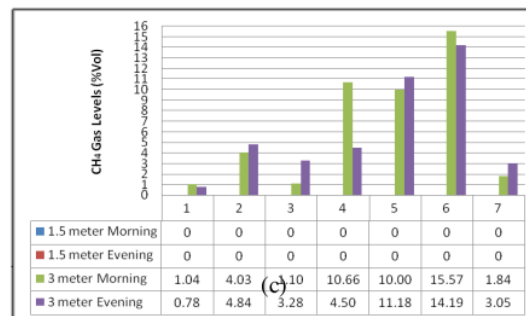

4

4

4

Figure 1. CH₄ gas content at Klotok I Landfill (a) CH₄ gas content in Klotok Cell 2 (b) CH₄ gas content in Klotok I Cell 3 (c)

CH₄ gas is abundantly produced in Cell 2 due to the process of waste decomposition (organic matter) by microbes in anaerobic conditions [3]. CH₄ gas formation in the landfill was affected by the degradation of organic matter from other waste in the landfill [7]. The observation point at Cell 2 was located not far from Cell 3 that was currently receiving a new pile of waste. New waste piles in Cell 3 indirectly affected CH₄ gas that was produced in Cell 2. The gas production would be restricted for a while due to the cell covering [8]. The gas level of CH₄ can be considered high in Cell 2. This is also caused by the absence of gas harvesting process that is done on full extent. In addition, there are still not many CH₄ gas catcher pipes that was installed. The condition indicates that the process of gas harvesting was not. As a result, the unreleased CH₄ gas content was still high.

The absence of CH₄ gas content at 1.5 m depth can be caused by various factors, including the physical condition of the environment such as abiotic factors; temperature, and soil pH balance that did not support methanogenic bacteria to grow. Methanogenic bacteria are activated at an environmental temperature of 30°C-50°C, while the optimal temperature in CH₄ gas formation in landfill is between 30°C - 45°C [9]. In addition, the absence of CH₄ gas at a depth of 1.5 m can also be caused by its volatile nature in the ambient air, so the CH₄ gas that is formed on the top layer of waste landfill will easily evaporate and disappear [3].

The fluctuating CH₄ gas level in this cell that becomes suddenly high on the 6th observation was due to the waste reaccumulation. At the time of observation, there was a recent piling activity in Cell 3 for about 2 weeks. This activity certainly affected the existence of organic materials, environmental conditions, and the decomposing microorganisms, thus affecting the production of CH₄ gas. Some of these conditions are shown in Figure 2.



(a)

(b)

Figure 2. (a) Cell 3 condition at Klotok I Landfill with newly accumulated waste and (b) the height of waste pile during the measurement of CH₄ gas in Cell 3.

3.2 CH₄ Gas Content Taken From The Waste Pile At Klotok II Landfill Kediri City

Point 1 of the CH₄ gas content measurement was in Cell 2 of Klotok II Landfill with the waste pile aged approximately six months. The second point of data collection was in Cell 1 of Klotok II

Landfill with waste pile that ages approximately three months old. The cell with the most recent waste pile was Point 3, aged about one month.

CH₄ gas production in a landfill is affected by the process of waste degradation by bacteria [7]. Under certain conditions, such as different waste compositions, pH, and unsuitable temperature of the waste pile. Hence, the process of waste degradation at the stage of acidogenesis requires more time. This will lead to CH₄ gas production that will decrease initially and will increase eventually with the passage of time, following degradation process at the methanogenesis stage [7].

According to Fig. 3, it can be seen that the average CH₄ gas content that was produced per day in Cell 3 Klotok II Landfill of Kediri was approximately 19.76 ± 17% volume. Point 3 in Klotok II Landfill was aged approximately one month old. This waste pile was considered as the newer one. The final waste collection process at this point was performed around one month prior to the observation. This disabled the process of waste degradation to be done optimally and caused an unstable production of CH₄ gas as the result of organic waste decomposition process by microbes [10].

Based on Figure 3, in Klotok I Landfill, there was still a high level of CH₄ gas production in Cell 2 that was almost as large as in Klotok II Landfill. Therefore, CH₄ gas was still potentially harvested in this landfill passive zone. This caused the waste degradation process at Klotok I Landfill to be not optimal, enabling the production of CH₄ gas as a result of organic waste decomposition [10].

At Klotok II Landfill, there was a process of CH₄ gas production with different levels at each observation point. What influenced this was the age of the waste pile [11]. Under certain conditions, such as different waste compositions and mismatching pH and temperature of the waste pile. Hence, the process of waste degradation at the stage of acidogenesis required more time. This would lead to CH₄ gas production that would decrease initially and eventually increase along with the passage of time of the degradation process at the methanogenesis stage [7].

Klotok Landfill of Kediri City, especially Klotok II Landfill, has a high level of CH₄ gas. This condition, if not managed and utilized properly, may cause serious damage to the environment, as well as global warming. CH₄ gas has a very high potential to be utilized as alternative fuels, such as the fuel for household stoves that have been applied in small areas around Klotok Landfill.

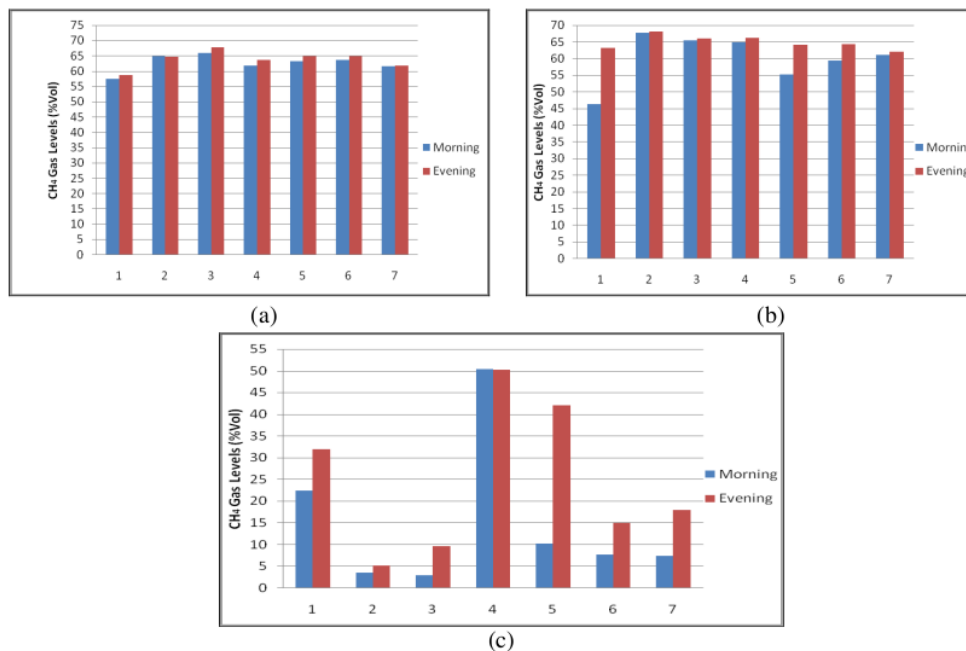


Figure 3. (a) CH₄ gas levels at Klotok II Landfill Point 1, (b) CH₄ gas levels at Klotok II Landfill point 2, (c) CH₄ gas levels at Klotok II Landfill point 3.

Every 6-8 m³ of CH₄ gas that emitted from garbage entering Sumur Batu Bekasi Landfill can be used as alternative fuel to operate stoves for 15 hours [3]. If the average daily use of the stove is 4 hours, the Klotok Landfill in Kediri is able to produce alternative fuel as a renewable energy source that can be used for 3,400 hours or about ± 9 years. In the long term, CH₄ gas has the potential to be used for renewable energy. The use of this renewable energy also serves as the application of environmentally friendly technology in order to prevent damages and negative impacts on the environment (green technology).

4. Conclusion

The average of CH₄ levels at Klotok I Landfill on three points of measurement at Cell 1, Cell 2, and Cell 3 were (1.8 ± 0.71); (62.46 ± 3.19); and (3.07 ± 2.65) % Vol, respectively. The highest CH₄ levels at Klotok I Landfill was in Cell 2, which was almost similar to Klotok II Landfill. The CH₄ levels in each measurement points 1, 2, and 3 in the Klotok II Landfill were (63.21 ± 2.61); (62.46 ± 4.70); and (19.76 ± 17) % Vol, respectively. The highest CH₄ levels at Klotok II Landfill was in Point 1. A high CH₄ levels at Klotok Landfill Kediri City can be utilized as an alternative fuel for renewable energy source appropriate with the concept of green technology.

5. Acknowledgment

The writers express their gratitude to the Solid Waste and Environmental Technology Team, Environmental Science and Technology Program, Department of Biology, Faculty of Science and Technology, Airlangga University; Research Team of State University of Malang, Robot Laboratory; Klotok Landfill Kediri; and Environment, Cleanliness, and Urban Planning Office of Kediri City that has assisted this research.

References

- [1] Mohajan, M. K. 2012. Dangerous Effects of Methane Gas in Atmosphere. *International Journal of Economic and Political Integration*, 2(1): 3–10.
- [2] KemenLH. 2016. Pusat Sarana Pengendalian Dampak Lingkungan Hidup. Laporan Inventarisasi Emisi Gas Rumah Kaca (GRK) dari sumber limbah (domestik). <http://www.kemenvh.go.id>. Accessed at 27 December 2016, 22.57 WIB.
- [3] Lestari, L.I., Soemirat, J., & Dirgawati, M. 2013. Penentuan Kadar Gas Metan di Udara Zona 4 TPA Sumur Batu Kota Bekasi. *Jurnal Institut Teknologi Nasional* Vol. 1 No. 1: 1-11.
- [4] Fischer, C., Maurice, C., and Lagerkvist, A. 1999. *Gas Emission from Landfills: An overview of issues and research needs*. Swedish Environmental Protection Agency, Stockholm.
- [5] Saragih, B. R. 2010. Analisis Potensi Biogas untuk Menghasilkan Energi Listrik dan Thermal pada Gedung Komersil di Daerah Perkotaan, *Thesis*, Universitas Indonesia, Jakarta.
- [6] Andhika, R., Lanti, Y., & Setyono, P. 2015. Pengaruh Paparan Gas CH₄ (CH₄), Karbon Dioksida (CO₂) Dan Hydrogen Sulfida (H₂S) Terhadap Keluhan Gangguan Pernapasan Pemulung Di Tempat Pembuangan Akhir (TPA) Sampah Klotok Kota Kediri. *Jurnal EKOSAINS*, Vol. VII No. 2: 105-116.
- [7] Sai, G., Lei, L., Qiang, X., & Zhiming, Y. 2016. Effects Of Exogenous Aerobic Bacteria on Methane Production and Biodegradation of Municipal Solid Waste in Bioreactors. *Journal Elsevier Waste Management* 55: 93 98.
- [8] Herlambang, A., Sutanto, H., & Wibowo, K. 2010. Produksi Gas Metana dari Pengolahan Sampah Perkotaan dengan Sistem Sel. *Jurnal Teknologi Lingkungan Badan Pengkajian dan Penerapan Teknologi*, Vol. 11 No. 3: 389-399 ISSN 1441-318X.
- [9] Qasaimeh, A. 2012. Intelligent MSW Biocell Approach for Efficient Methane Production. *Computational Water, Energy, and Environmental Engineering* No. 1: 24-30.
- [10] Marwah, S., Harlia, E., & Juanda, W. 2016. Analisis Kualitas Gas Metana dan Jumlah Bakteri Anaerob pada Proses Pembentukan Biogas dari Feses Sapi Potong dalam Tabung Hungate. *Jurnal Universitas Padjajaran*.

- [11] Gonzalez, C., Otoniel, B., Liliana, M., Consuelo, H., Edgar, M., & Fabian R. 2011. Effect of Solid Waste Composition and Confinement Time on Methane Production in A Dump. *Journal of Environmental Protection*, Vol. 2: 1310-1316.

The potential of methane gas production at Klotok Landfill Kediri City

ORIGINALITY REPORT

13%

SIMILARITY INDEX

10%

INTERNET SOURCES

12%

PUBLICATIONS

0%

STUDENT PAPERS

PRIMARY SOURCES

- 1 S Hariyanto, H N Rachmayani, N Citrasari, Z A Zalika, H M Faruqi. "The planning of non-medical solid waste management at Universitas Airlangga Hospital", IOP Conference Series: Earth and Environmental Science, 2019
Publication 6%
- 2 iopscience.iop.org
Internet Source 2%
- 3 A I Agusningtyas, N Citrasari, S Hariyanto, A F Maldi. "Processing of plastic waste from Klotok Landfill Kediri City with thermal cracking method", IOP Conference Series: Earth and Environmental Science, 2019
Publication 1%
- 4 D R M Isnadina, M. P. Adi, I. Ardiyanto. "Technical evaluation of leachate treatment plant at Klotok Landfill Kediri in 2017", IOP Conference Series: Earth and Environmental Science, 2019
Publication 1%

5	www.lib.unair.ac.id Internet Source	1 %
6	www.tandfonline.com Internet Source	1 %
7	www.academicjournals.org Internet Source	1 %
8	N Citrasari, K P A Pamungkassari, T W C Putranto, N Hamidah. "Paving block with product 1 material as a substitute of portland cement and landfill mining residue", IOP Conference Series: Earth and Environmental Science, 2019 Publication	<1 %
9	www.trijurnal.lemlit.trisakti.ac.id Internet Source	<1 %
10	S Sendari, Y Rahmawati, W Kamdi, H Elmunsyah, W Agustin, N C Hadi, F S Wibowo, T Matsumoto, I Rahman. "Internet-based monitoring and warning system of methane gas generated in garbage center", IOP Conference Series: Earth and Environmental Science, 2018 Publication	<1 %

Exclude bibliography On

The potential of methane gas production at Klotok Landfill Kediri City

GRADEMARK REPORT

FINAL GRADE

GENERAL COMMENTS

/0

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7
