



Browse

My Settings

Help

Institutional Sign In

Institutional Sign In

All



ADVANCED SEARCH

Quick Links

Search for Upcoming Conferences

Browse Conferences > International Conference of In... > 2022 10th International Confer... ?

IEEE Publication Recommender

IEEE Author Center

# International Conference of Information and Communication Technology (ICoICT)

Proceedings

The proceedings of this conference will be available for purchase through Curran Associates.

Information and Communication Technology (ICoICT), 2022 10th International Conference on



Print on Demand **Purchase at Partner**

Copy Persistent Browse Title List Sign up for Conference Alerts  
Link

Proceedings

All Proceedings

Popular

2022 10th International Conference on Information and Communication Technology (ICoICT) DOI: 10.1109/2-3 Aug. 2022

DOI: 10.1109/

Search within results

Per Page: 1 Per Page 25 | Export | Email Sel

Showing 1-25 of 83

sort: Sort Sequence

Email

Refine

Author



Affiliation



Greetings from the General Chair  
Publication Year: 2022 , Page(s): 1 - 3



Greetings from the General Chair  
2022 10th International Conference on Information and Communication Technology (ICoICT)  
Year: 2022

Program  
Publication Year: 2022 , Page(s): 1 - 19



Quick Links

Search for Upcoming Conferences

IEEE Publication Recommender

IEEE Author Center

IEEE websites place cookies on your device to give you the best user experience. By using our websites, you agree to the placement of these cookies. To learn more, read our Privacy Policy.



Accept & Close

Need Full-Text access to IEEE for your org CONTACT IEEE T



The proceedings of this conference will be available for purchase through Curran Associates.

**Information and Communication Technology (ICoICT), 2022 10th International Conference on**



Print on Demand **Purchase at Partner**





- Table of Contents**  
Publication Year: 2022 , Page(s): 4 - 11
-   **Table of Contents**  
2022 10th International Conference on Information and Communication Technology (ICoICT)  
Year: 2022





---

- Committees**  
Publication Year: 2022 , Page(s): 12 - 14
-   **Committees**  
2022 10th International Conference on Information and Communication Technology (ICoICT)  
Year: 2022

---

- Author Index**  
Publication Year: 2022 , Page(s): 15 - 30
-   **Author Index**  
2022 10th International Conference on Information and Communication Technology (ICoICT)  
Year: 2022

- Implementation of GKMC Algorithm for Data Anonymization on Big Data Platform Spark**   
Mariskha Tri Adithia; Veronica Sri Moertini; Stephen Jordan  
Publication Year: 2022 , Page(s): 29 - 34
- ▶ Abstract **HTML**  
- Implementation of GKMC Algorithm for Data Anonymization on Big Data Platform Spark**   
Mariskha Tri Adithia; Veronica Sri Moertini; Stephen Jordan  
2022 10th International Conference on Information and Communication Technology (ICoICT)  
Year: 2022

- Feature Selection and Sensitivity Analysis of Oversampling in Big and Highly Imbalanced Bank's Credit Data**   
Aznovri Kurniawan; Ahmad Rifa'i; Moch Abdillah Nafis; Nimas Sefrida Andriaswuri; Harry Patria; Diana Purwitasari  
Publication Year: 2022 , Page(s): 35 - 40
- ▶ Abstract **HTML**  
- Feature Selection and Sensitivity Analysis of Oversampling in Big and Highly Imbalanced Bank's Credit Data**   
Aznovri Kurniawan; Ahmad Rifa'i; Moch Abdillah Nafis; Nimas Sefrida Andriaswuri; Harry Patria; Diana Purwitasari  
2022 10th International Conference on Information and Communication Technology (ICoICT)  
Year: 2022

- Serious Exergame for Special Education Needs using 3D-** 



**Interma  
Sendai,  
May 1**

**Lea**


### Depth Camera

Ari Kusumaningsih; Arik Kurniawati; Rima Tri Wahyuningrum;

Ach. Khozaimi; Rizal Nanda Pratama

Publication Year: 2022 , Page(s): 59 - 63

► Abstract **HTML**  

- Serious Exergame for Special Education Needs using 3D-Depth Camera** 

Ari Kusumaningsih; Arik Kurniawati;


Rima Tri Wahyuningrum; Ach. Khozaimi;

Rizal Nanda Pratama

2022 10th International Conference on Information and

Communication Technology (ICoICT)


Year: 2022

- 
- The Effect of Influencer Information and Video Characteristics on User Purchase Decision on Social Media** 

Widia Resti Fitriani; Felia Risky Faizal; Putu Wuri Handayani

Publication Year: 2022 , Page(s): 41 - 46

► Abstract **HTML**  

- The Effect of Influencer Information and Video Characteristics on User Purchase Decision on Social Media** 

Widia Resti Fitriani; Felia Risky Faizal; Putu Wuri Handayani

2022 10th International Conference on Information and

Communication Technology (ICoICT)

Year: 2022


- 
- Health Data Governance Issues in Healthcare Facilities: Perspective of Hospital Management** 

Shinta Oktaviana R; Putu Wuri Handayani;

Ahmad Nizar Hidayanto

Publication Year: 2022 , Page(s): 1 - 5

► Abstract **HTML**  

- Health Data Governance Issues in Healthcare Facilities: Perspective of Hospital Management** 

Shinta Oktaviana R; Putu Wuri Handayani;

Ahmad Nizar Hidayanto

2022 10th International Conference on Information and

Communication Technology (ICoICT)

Year: 2022

- 
- The Implementation and Impact of Gamification on User Engagement and Acceptance of Mobile Personal Health Record Application** 


Winayaka Ruhur Pamungkas; Putu Wuri Handayani;

Ave Adriana Pinem


Publication Year: 2022 , Page(s): 64 - 69


► Abstract **HTML**  

- The Implementation and Impact of Gamification on User Engagement and Acceptance of Mobile Personal Health Record Application**   
Winayaka Ruhur Pamungkas; Putu Wuri Handayani;  
Ave Adriana Pinem  
2022 10th International Conference on Information and Communication Technology (ICoICT)  
Year: 2022


- 
- The Influence of Individual, Process, Technology, and Environment Dimensions on Intention and Actual Usage of PeduliLindungi Application**   
Ibad Rahadian Saladdin; Putu Wuri Handayani  
Publication Year: 2022 , Page(s): 47 - 52


▶ Abstract [HTML](#)  

- The Influence of Individual, Process, Technology, and Environment Dimensions on Intention and Actual Usage of PeduliLindungi Application**   
Ibad Rahadian Saladdin; Putu Wuri Handayani  
2022 10th International Conference on Information and Communication Technology (ICoICT)  
Year: 2022


- 
- Performance Analysis Between EOTI-K-Means++, EOTI, and KNN for Brute Force Detection System**   
Bintang Nuralamsyah; Sherly Rosa Anggraeni; Labba Awwabi;  
Narandha Arya Ranggianto; Hudan Studiawan;  
Ary Mazharuddin Shiddiqi  
Publication Year: 2022 , Page(s): 53 - 58

▶ Abstract [HTML](#)  

- Performance Analysis Between EOTI-K-Means++, EOTI, and KNN for Brute Force Detection System**   
Bintang Nuralamsyah; Sherly Rosa Anggraeni;  
Labba Awwabi; Narandha Arya Ranggianto;  
Hudan Studiawan; Ary Mazharuddin Shiddiqi  
2022 10th International Conference on Information and Communication Technology (ICoICT)  
Year: 2022

- 
- Mango Pests Identification Based-on Convolutional Neural Network**   
Misbachul Falach Asy'ari; Anisa Nur Azizah;  
Shintami Chusnul Hidayati; Darlis Herumurti  
Publication Year: 2022 , Page(s): 88 - 92

▶ Abstract [HTML](#)  

- Mango Pests Identification Based-on Convolutional Neural Network**   
Misbachul Falach Asy'ari; Anisa Nur Azizah;  
Shintami Chusnul Hidayati; Darlis Herumurti


2022 10th International Conference on Information and Communication Technology (ICoICT)  
Year: 2022

**Glaucoma Detection Based-on Convolution Neural Network and Fundus Image Enhancement** 


Dina Zatusiva Haq; Labba Awwabi; Shintami Chusnul Hidayati;  
Darlis Herumurti

Publication Year: 2022 , Page(s): 6 - 11

► Abstract **HTML**  


**Glaucoma Detection Based-on Convolution Neural Network and Fundus Image Enhancement** 

Dina Zatusiva Haq; Labba Awwabi;  
Shintami Chusnul Hidayati; Darlis Herumurti  
2022 10th International Conference on Information and  
Communication Technology (ICoICT)  
Year: 2022

**Performance Comparison Between Support Vector Regression and Long Short - Term Memory for Prediction of Stock Market** 

Nova Monica Sarumpaet; Indwiarti; Aniq Atiqi Rohmawati  
Publication Year: 2022 , Page(s): 168 - 173

► Abstract **HTML**  

**Performance Comparison Between Support Vector Regression and Long Short - Term Memory for Prediction of Stock Market** 

Nova Monica Sarumpaet; Indwiarti; Aniq Atiqi Rohmawati  
2022 10th International Conference on Information and  
Communication Technology (ICoICT)  
Year: 2022

**SSH Bruteforce Attack Classification using Machine Learning** 

Marco Ariano. Kristyanto; Ice Krisnahati; Franky Rawung;  
Dzhillan Dzhaila; Bima Dinda Nurwibawa; Wisnu Murti;  
Baskoro Adi Pratomo; Ary Mazharuddin Shiddiqi  
Publication Year: 2022 , Page(s): 116 - 119

► Abstract **HTML**  


**SSH Bruteforce Attack Classification using Machine Learning** 


Marco Ariano. Kristyanto; Ice Krisnahati; Franky Rawung;  
Dzhillan Dzhaila; Bima Dinda Nurwibawa; Wisnu Murti;  
Baskoro Adi Pratomo; Ary Mazharuddin Shiddiqi  
2022 10th International Conference on Information and  
Communication Technology (ICoICT)  
Year: 2022

**An Improved Accuracy of Indoor Positioning System Based on Trilateration using Kalman Filter** 


Waskitho Wibisono; Agung Dwi Wicaksono  
Publication Year: 2022 , Page(s): 174 - 178


► Abstract **HTML**  

**An Improved Accuracy of Indoor Positioning System Based on Trilateration using Kalman Filter**   
Waskitho Wibisono; Agung Dwi Wicaksono  
2022 10th International Conference on Information and Communication Technology (IColCT)  
Year: 2022


**Wavelet-based Entropy Analysis on EEG Signal for Detecting Seizures**   
Annisa Humairani; Achmad Rizal; Inung Wijayanto;  
Sugondo Hadiyoso; Yunendah Nur Fuadah  
Publication Year: 2022 , Page(s): 93 - 98  
Cited by: Papers (1)


▶ Abstract [HTML](#)  

**Wavelet-based Entropy Analysis on EEG Signal for Detecting Seizures**   
Annisa Humairani; Achmad Rizal; Inung Wijayanto;  
Sugondo Hadiyoso; Yunendah Nur Fuadah  
2022 10th International Conference on Information and Communication Technology (IColCT)  
Year: 2022

**Leaf Based Plant Species Classification Using Deep Convolutional Neural Network**   
Agus Eko Minarno; Zaidah Ibrahim; Aswaty Nur;  
Muhammad Yusril Hasanuddin; Norizan Mat Diah;  
Yuda Munarko  
Publication Year: 2022 , Page(s): 99 - 104

▶ Abstract [HTML](#)  

**Leaf Based Plant Species Classification Using Deep Convolutional Neural Network**   
Agus Eko Minarno; Zaidah Ibrahim; Aswaty Nur;  
Muhammad Yusril Hasanuddin; Norizan Mat Diah;  
Yuda Munarko  
2022 10th International Conference on Information and Communication Technology (IColCT)  
Year: 2022

**Semantic Segmentation of Venous on Deep Vein Thrombosis (DVT) Case using UNet-ResNet**   
Arta Kusuma Hernanda; I Ketut Eddy Purnama;  
Eko Mulyanto Yuniarno; Johannes Nugroho  
Publication Year: 2022 , Page(s): 105 - 109

▶ Abstract [HTML](#)  

**Semantic Segmentation of Venous on Deep Vein Thrombosis (DVT) Case using UNet-ResNet**   
Arta Kusuma Hernanda; I Ketut Eddy Purnama;  
Eko Mulyanto Yuniarno; Johannes Nugroho  
2022 10th International Conference on Information and Communication Technology (IColCT)  
Year: 2022

Yulian Findawati; Kresna Adhi Pramana; Agus Budi Raharjo;

Totok Wahyu Abadi; Diana Purwitasari

Publication Year: 2022 , Page(s): 179 - 183

▶ Abstract HTML  

- Aspect Based Multilabel Text Classification for Identifying Dangerous Speech Twitter Text 

Yulian Findawati; Kresna Adhi Pramana; Agus Budi Raharjo;  
Totok Wahyu Abadi; Diana Purwitasari  
2022 10th International Conference on Information and  
Communication Technology (ICoICT)  
Year: 2022

- Improving Low-Resource Question Answering with Cross-Lingual Data Augmentation Strategies 

Ryan Pramana; Radityo Eko Prasajo  
Publication Year: 2022 , Page(s): 110 - 115

▶ Abstract HTML  


- Improving Low-Resource Question Answering with Cross-Lingual Data Augmentation Strategies 

Ryan Pramana; Radityo Eko Prasajo  
2022 10th International Conference on Information and  
Communication Technology (ICoICT)  
Year: 2022


- Evaluation of a Platform-Based Business Model in a Startup, A Case Study 

Muhammad Fadil Fidrian; Putu Wuri Handayani  
Publication Year: 2022 , Page(s): 184 - 189

▶ Abstract HTML  


- Evaluation of a Platform-Based Business Model in a Startup, A Case Study 

Muhammad Fadil Fidrian; Putu Wuri Handayani  
2022 10th International Conference on Information and  
Communication Technology (ICoICT)  
Year: 2022

- Covid-19 Smart Contact Tracing Solution: A Process Methodology on Attribute Selection 

Thein Oak Kyaw Zaw; Saravanan Muthaiyah;  
Muhammad Afif Bin Mohd Fathullah; Ali Jasbi  
Publication Year: 2022 , Page(s): 12 - 16

▶ Abstract HTML  

- Covid-19 Smart Contact Tracing Solution: A Process Methodology on Attribute Selection 

Thein Oak Kyaw Zaw; Saravanan Muthaiyah;  
Muhammad Afif Bin Mohd Fathullah; Ali Jasbi  
2022 10th International Conference on Information and  
Communication Technology (ICoICT)  
Year: 2022

CHANGE USERNAME/PASSWORD

PAYMENT OPTIONS

COMMUNICATIONS PREFERENCES

US & CANADA: +1 800 4333

YEAR PURCHASED

DOCUMENTS

PROFESSION AND EDUCATION

WORLDWIDE: +1 732 8888

IEEE websites place cookies on your device to give you the best user experience. By using our websites, you agree to the placement of these cookies. To learn more, read our Privacy Policy.

TECHNICAL INTERESTS

CONTACT & SUPPORT

Accept & Close

### IEEE Account

- » Change Username/Password
- » Update Address

### Purchase Details

- » Payment Options
- » Order History
- » View Purchased Documents

### Profile Information

- » Communications Preferences
- » Profession and Education
- » Technical Interests

### Need Help?

- » **US & Canada:** +1 800 755 4542
- » **Worldwide:** +1 732 349 7000
- » Contact & Support

[About IEEE \*Xplore\*](#) [Contact Us](#) [Help](#) [Accessibility](#) [Terms of Use](#) [Nondiscrimination Policy](#) [Sitemap](#) [Privacy & Opting Out of Cookies](#)

A not-for-profit organization, IEEE is the world's largest technical professional organization dedicated to advancing technology for the benefit of humanity.  
© Copyright 2023 IEEE - All rights reserved. Use of this web site signifies your agreement to the terms and conditions.

IEEE websites place cookies on your device to give you the best user experience. By using our websites, you agree to the placement of these cookies. To learn more, read our [Privacy Policy](#).

Accept & Close



# Semantic Segmentation of Venous on Deep Vein Thrombosis (DVT) Case using UNet-ResNet

1<sup>st</sup> Arta Kusuma Hernanda

*Department of Electrical Engineering  
Institut Teknologi Sepuluh Nopember  
Surabaya, Indonesia  
6022211010@student.its.ac.id*

2<sup>nd</sup> I Ketut Eddy Purnama

*Department of Electrical Engineering  
Department of Computer Engineering  
Institut Teknologi Sepuluh Nopember  
Surabaya, Indonesia  
ketut@te.its.ac.id*

3<sup>rd</sup> Eko Mulyanto Yuniarno

*Department of Electrical Engineering  
Department of Computer Engineering  
Institut Teknologi Sepuluh Nopember  
Surabaya, Indonesia  
ekomulyanto@ee.its.ac.id*

4<sup>th</sup> Johannes Nugroho

*Departement of Cardiology  
Airlangga University  
Surabaya, Indonesia  
j.nugroho.eko@fk.unair.c.id*

**Abstract**—Deep Vein Thrombosis (DVT) is caused by an abnormal condition of blood clots in the network of blood vessels. No accurate profile data has been found on the number of common DVT cases in Indonesia. Several studies were conducted in several hospitals but with small sample sizes. In common cases, the diagnosis of DVT is made using Doppler Ultrasonography to monitor the condition of blood flow through the veins. This study uses the UNet-ResNet Deep Learning model to semantically segment the venous area on a 2D ultrasound image. The segmentation model is built from the pre-trained model UNet with the encoder ResNet-34. The dataset is taken from phantoms, a human body parts simulation tool. Ultrasound image acquisition on the Phantom will use Ultrasound Telemed SmartUs EXT-1M, which is directly connected to a PC. The segmentation model from the training process was evaluated with the Intersection-over-Union score (IoU) and Dice Loss. The result of the IoU evaluation on the standard UNet model resulted in an IoU score of 81.22% and an assessment of the dice loss of 0.1341. The UNet segmentation model assessment results with the ResNet-34 encoder using the IoU score of 84.50% and the dice loss matrix evaluation of 0.0857. The ResNet-34 model as an encoder in the UNet architecture can improve segmentation accuracy.

**Index Terms**—Semantic Segmentation, Ultrasound Image, UNet-ResNet

## I. INTRODUCTION

Deep Vein Thrombosis (DVT) is a disease caused by forming of a blood clot (thrombus) in a deep vein. These blood clots can block blood vessels in the lungs, potentially causing serious conditions, such as Pulmonary Embolism (PE) [1]. There is no official confirmation regarding the total number of DVT cases in Indonesia. Still, in 2020 a research at RSUP Dr. Kariadi Semarang reported an increased risk of DVT in patients with glioblastoma and COVID-19 infection due to hypercoagulability and coagulopathy due to tumor cells and the SARS-CoV-2 virus [2].

Medical imaging of DVT cases can use MRI, CT Scan, and Ultrasound (USG) to diagnose DVT areas. The ultrasound modality is the doctor's initial choice in diagnosing a group

of patients who are most likely to be positive for DVT [3]. The choice of ultrasound as a diagnostic modality for DVT does not cause pain to the patient, does not pose a risk of spreading radiation exposure to the doctor or patient, and the cost of imaging using ultrasound is much cheaper than CT Scan and MRI. Doppler ultrasound is a type of ultrasound used in diagnosing blood clots based on the results of the evaluation of blood flow in the veins.

A study that clustered DVT on ultrasound was conducted by Berthomier et al. [4]. However, they did not show the clustering results, which proved that the segmentation was successful. Cluster-based segmentation on ultrasound images does not give good results. Studies on blood vessel segmentation were carried out using an elliptical shape approach by Sunarya et al. [5] and Guerrero et al. [6]. In patients with DVT, the use of an ellipse to determine the contours of blood vessels on ultrasound images is difficult because blood clots block it. The weakness of the elliptical approach method is that it is only an estimated outline of the detection area and not the actual area. Research conducted by M. Ikhsan et al. [7] showed the results of identification and classification of blood vessels could be done using the cascading classifier method. Research by Jianfeng et al. [8] finger-vein segmentation based on KFCM and active contour model succeeded in combining the traditional active contour method with a fuzzy kernel to produce an optimal segmentation process. The technique used in the two studies that have been mentioned is still using the semi-automatic method.

Semantic segmentation is the task of producing pixel-level labelling of different object categories. In medical image segmentation, this translates to separating the dominant background class from the smaller Region Of Interest (ROI) class, to produce a binary segmentation map. Studies on automated semantic segmentation using the Deep Learning model Xin Yang et al. [9] and Nabila et al. [10]. The research shows the success of the UNet model training for detecting and

segmenting outliers in the specified area. According to Yang Ji et al., the accuracy of Dual-Path UNet was 4% - 5% greater than that of Seg-Net and UNet utilizing an intravascular dataset from Ultrasound. Intravascular modalities can only be achieved since ultrasound must be put into the body and into the vessels [11]. Lang Yuan et al. [12] discovered that when compared to the standard UNet architecture, the modified UNet design with ResNet can recognize many objects with a greater degree of accuracy. The use of deep learning models with multi-object detection capabilities is very important in the case of medical imaging DVT which will detect two object outlines, the vein area, and the blood clot area.

Specifically, we employ the UNet as our segmentation framework and perform some experiments on UNet architecture's encoder. To improve the segmentation accuracy performance we provide use ResNet-32 to construct the contraction part of U-Net on Figure 3. Therefore, the residual structure guarantees the network a better description capability when contracting images with deeper layers. This study aims to produce a comparative analysis of UNet and UNet-ResNet in the segmentation of ultrasound images of veins. The best-performing model will then be used in the development stage of a clot determination system (thrombus) in the DVT case.

## II. MATERIALS AND METHODS

### A. Data Acquisition

The ultrasound Telemed SmartUs EXT-1M modality and Echowave II software collected venous ultrasound image data. Researchers collected ultrasound data on a lab-scale and handled it directly. Data is taken from phantom body parts. The total data used is 536 ultrasound images, where 445 data are used for training, 81 data for validation of training, and 10 data for testing. The probe used for the image data collection on Phantom is a linear probe-type L15-7L40H-5. This probe has a frequency range of 7.5 MHz - 15 MHz. Figure 1 shows phantom, modality to acquired data ultrasound image, and probe.

### B. Preprocessing

Ultrasound image data acquired using Ultrasound Telemed SmartUs EXT-1M is still raw data, so the acquired image needs to be refined in the preprocessing stage. Preprocessing has several stages. The first is removing unnecessary parts from the image by cropping. This method can eliminate unnecessary parts and focus the image on the object of the vein to be detected. Next is the stage of equalizing the size of the image by rescaling, the cropped image has a size that is not the same between one image and another. The ultrasound image size is set to 224x224 pixels.

Ultrasound imaging exhibits considerable difficulties for medical visual inspection and for the development of automatic analysis methods due to speckle, which negatively affects the perception of tissue boundaries and the performance of automatic segmentation methods. Anisotropic diffusion filter was chosen to reduce image noise without removing significant parts of the image content. Anisotropic diffusion

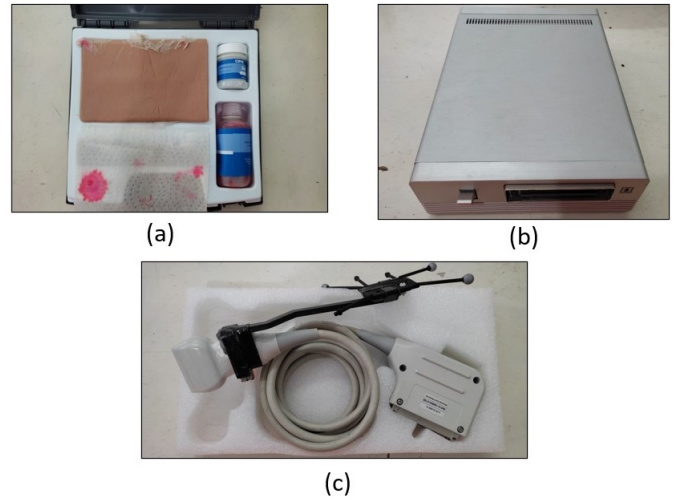


Fig. 1. (a) Phantom human body part standart, (b) USG modality Telemed SmartUs EXT-1M, and (c) Linear Probe type L15-7L40H-5.

resembles the process that creates a scale space, where an image generates a parameterized family of successively more and more blurred images based on a diffusion process. The method needs the estimate of a parameter  $q_0(t)$  related to the coefficient of noise variation. The estimation of this parameter is precisely the weakest point of the method [13]. Aisotropic diffusion filter in image filtering is shown in 1.

$$\frac{\partial u(\mathbf{x}, t)}{\partial t} = \nabla \cdot (c(q) \nabla u(\mathbf{x}, t)),$$

$$u(\mathbf{x}, t = 0) = u_0(\mathbf{x}), \quad \left. \frac{\partial u(\mathbf{x}, t)}{\partial \hat{n}} \right|_{\partial \Omega} = 0, \quad (1)$$

The last step in preprocessing ultrasound images is creating a masking image (labelling) on ROI of venous. The labelling process using the freehand method. Figure 2 show an overlay ultrasound image of venous ROI.

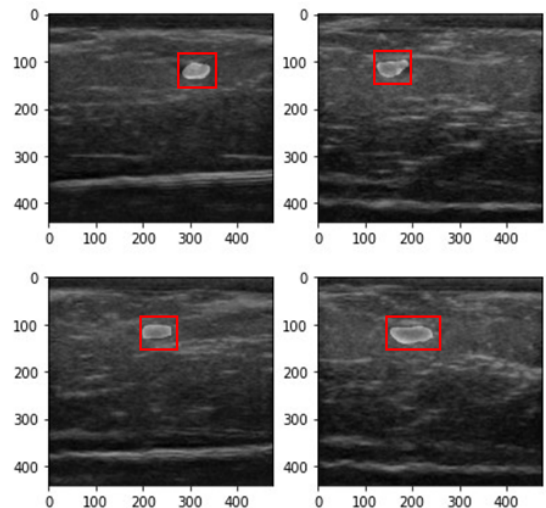


Fig. 2. Venous ROI on Overlay Ultrasound Image.

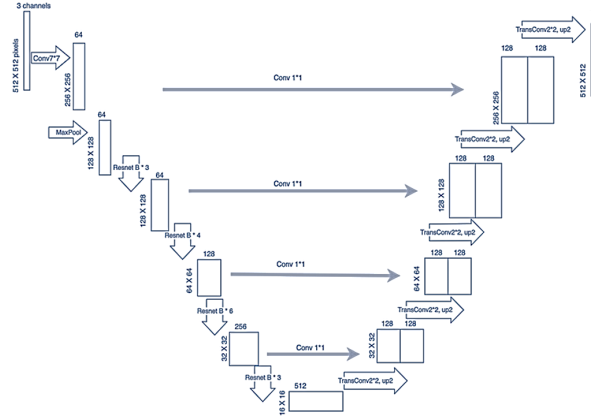


Fig. 3. UNet Architecture with ResNet Encoder

### C. Model

UNet is a fully convolutional neural network for semantic image segmentation. Convolutional neural networks are commonly used for classification tasks, where the output to an image is a single class label. However, in many visual jobs, particularly in biomedical image processing, the intended result should contain localization, and each pixel should be allocated a class label. Furthermore, thousands of training images in biomedical tasks are generally out of reach. Trained a network in a sliding-window setup to predict the class label of each pixel by providing a local region (patch) around that pixel [14]. Comprises encoder and decoder elements linked via skip connections. The encoder extracts characteristics of varying spatial resolution (skip connections), which are then employed by the decoder to produce an appropriate segmentation mask. Concatenation is used to join decoder blocks with skip connections.

In theory, an increase in the number of layers in a neural network should increase the quality of the model as long as over-fitting is taken care of. However many architectures have the problem of "vanishing gradients". The ResNet architecture is designed to solve this problem. It is based on the idea of shortcut connections. They make it possible to guarantee that with an increase in the number of layers of a neural network it will not need to learn the identical transformation to remain no worse than its counterpart with fewer layers. This is because immediately add a direct connection between the output of each layer with the input of the next to it layer. Thus the neural network remains to learn only residuals. In this regard, ResNet has a great advantage: it is relatively easy to optimize and thereby increases accuracy by adding more layers [15]. Figure 3 shows UNet architecture with ResNet encoder backbone.

### D. Segmentation Evaluation Metrics

To evaluate the model trained performance, use Intersection over Union (IoU) and Dice Loss. The quality measure used is IoU, also known as the Jaccard index; it is one of the most used metrics in semantic segmentation, shown in equation 2. IoU is a stan extremely powerful and very simple metric. IoU

equals the overlap between the predicted segmentation and the terrain truth, divided by the joining area between the predicted segmentation and the terrain truth [16].

$$IoU = \frac{B_1 \cap B_2}{B_1 \cup B_2} \quad (2)$$

Dice equation 3 as a reproductive measure [17] as a form of validation of manual annotation statistics with segmenters repeatedly annotating with the same ultrasound image, then the pair-wise overlap of segmentation performed repeated calculations using Dice.

$$DICE = \frac{2(S_a|S_b)}{|S_a| + |S_b|} \quad (3)$$

### III. RESULT

This research was conducted on a computer-based on Anaconda with the processor specification of AMD Ryzen 5 4600H and NVIDIA GeForce GTX 1650 Ti. In training the UNet-ResNet model, several input parameters will be defined. Batch size will be defined as 16, epoch 40, initial learning rate of 0.001, the optimizer will use adam, and activation layer in the model architecture will use sigmoid. The first step is to divide the dataset from the data acquisition results with the proportion of 80% (445 images) for training data, 15% (81 images) for validation data and 5% (10 images) for testing data. The training process will use two different segmentation models, first using the standard UNet architectural model and then using the UNet model with the ResNet-34 encoder. The results of the IoU evaluation on the standard UNet model resulted in IoU score of 81.22% shown in Figure 4. The evaluation of the dice loss is 0.1341 shown in in Figure 5.

Training the UNet model with the ResNet-34 encoder using an ultrasound image dataset of venous shows an increase in the accuracy of segmentation of the venous area in each training epoch. The graph of the increase in IoU score in each training epoch can be seen in Figure 6. The results of the model performance evaluation using the IoU score show that the UNet-ResNet model can achieve IoU score of 84.50% and the dice loss value is at 0.0857 shown in Figure 7.

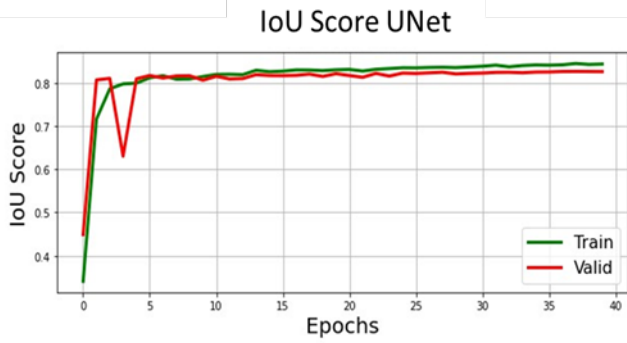


Fig. 4. IOu Score UNet Architecture

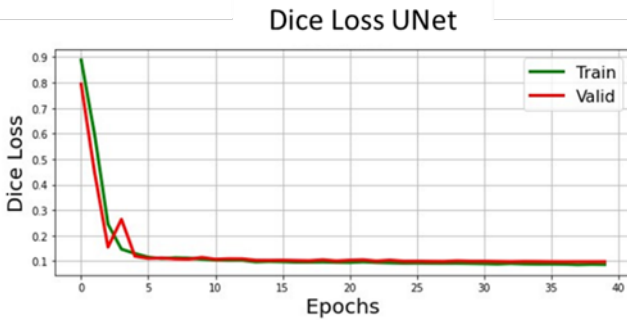


Fig. 5. Dice Loss UNet Architecture

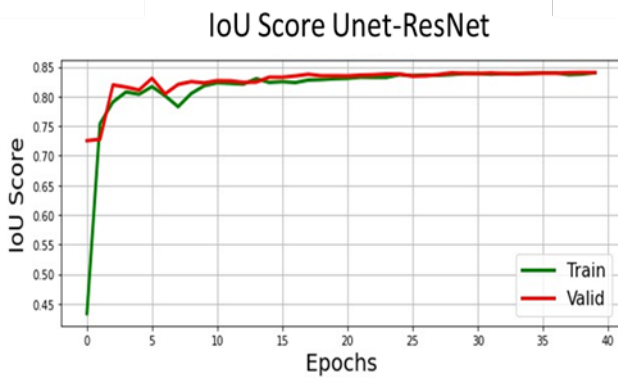


Fig. 6. IOu Score UNet-ResNet34 Architecture

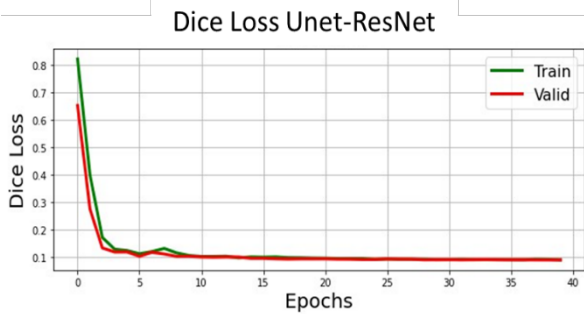


Fig. 7. Dice Loss UNet-ResNet34 Architecture

Different results were obtained from the training results of the two segmentation models, UNet and UNet-ResNet. Figure 8 shows the comparison results of segmentation visualization between UNet and UNet-ResNet model, on the left is an ultrasound image of veins as input, column 2 is a masking image (ground truth), column 3 is a predictive image of segmentation results using the UNet model, and column 4 is a predictive image of segmentation results using the UNet-ResNet model. After the model has gone through the training phase, the model will then be tested using 10 testing images. At this testing stage, the model shows the predicted results of the segmentation of the vein area which is shown in the yellow area.

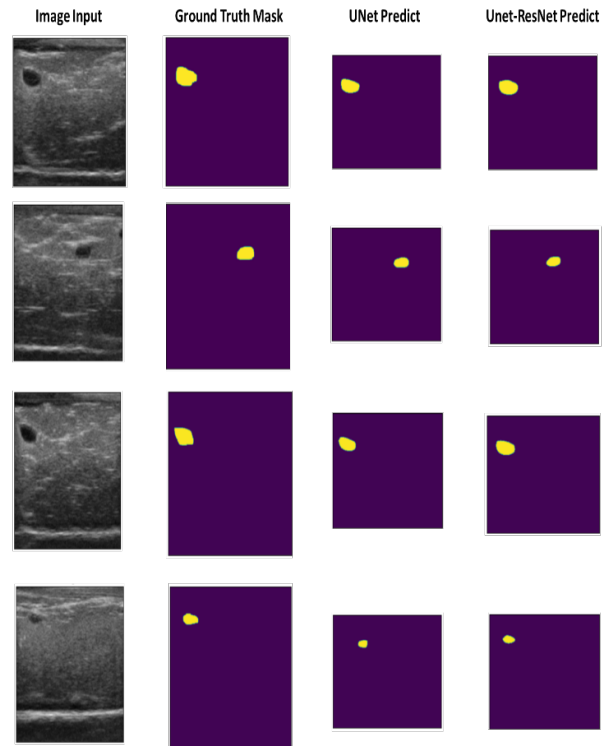


Fig. 8. Comparison Results of Segmentation Visualization between UNet and UNet-ResNet Model

Based on the graphical analysis (Figure 4) of the UNet training process, there is a vanishing gradient problem. This problem occurs because of the use of the sigmoid activation function. Because the value of the sigmoid function ranges from 0 to 1, the value of  $w$  will get smaller over time. The longer the layer, the faster the weight ( $w$ ) value will decrease, especially if repeated epoch processes. Thus, over time the value of the gradient  $\Delta w$  will approach zero, and the adjustment of the  $w$  value will no longer be significant. If the  $w$  value adjustment is not significant, the decrease in the epsilon value (error) will stagnate, even though the solution has not yet converged. The vanishing gradient problem can be solved by using ResNet architecture as UNet encoder, where a neuron skips several neurons in front of it. The results of the UNet-ResNet model training process in Figure 6 do not indicate the

occurrence of the vanishing gradient problem. Training results comparison between UNet and UNet-ResNet can be seen in Table I.

TABLE I  
TRAINING RESULTS COMPARISON UNET AND UNET-RESNET

Evaluation	Model	
	UNet	UNet-ResNet
IoU Score	81.22%	84.50%
Dice Loss	0.1341	0.0857

#### IV. CONCLUSION

Based on the comparison of the IoU scores for the segmentation of the venous area using the UNet-ResNet model with the standard UNet architecture, it shows that the segmentation accuracy performance of the UNet-ResNet model is better than the standard UNet model. The result of the IoU evaluation on the standard U-Net model resulted in IoU score of 81.22% and an assessment of the dice loss is 0.1341. The evaluation UNet segmentation model with the ResNet-34 encoder using the IoU score is 84.50% and evaluation of the dice loss matrix is 0.0857. ResNet-34 architecture for the UNet encoder can solve vanishing gradient problems during the training process. The segmentation of the UNet-ResNet34 model can provide better performance when compared to the UNet architecture. ResNet-34 model as an encoder in the UNet architecture can improve segmentation accuracy.

#### REFERENCES

- [1] L. Mazzolai, V. Aboyans, W. Ageno, G. Agnelli, A. Alatri, R. Bauersachs, M. P. A. Brekelmans, H. R. B"uller, A. Elias, D. Farge, S. Konstantinides, G. Palareti, P. Prandoni, M. Righini, A. Torbicki, C. Vlachopoulos, and M. Brodmann, "Diagnosis and management of acute deep vein thrombosis: a joint consensus document from the European Society of Cardiology working groups of aorta and peripheral vascular diseases and pulmonary circulation and right ventricular function," *European Heart Journal*, 02 2017.
- [2] D. Tugaworo, A. Kurnianto, R. Retnaningsih, Y. Andhitara, R. Ardhini, D. Priambada, and D. Daynuri, "Glioblastoma dengan deep vein thrombosis pada pasien covid-19: Sebuah laporan kasus," *Medica Hospitalia : Journal of Clinical Medicine*, vol. 7, no. 1A, p. 181-188, 2020.
- [3] P. Wells and D. Anderson, "The diagnosis and treatment of venous thromboembolism," *Hematology*, vol. 2013, no. 1, pp. 457-463, 12 2013.
- [4] T. Berthomier et al., "Unsupervised clustering of DVT Ultrasound Images using High Order Statistics," 2018 IEEE International Conference on Bioinformatics and Biomedicine (BIBM), Madrid, Spain, 2018, pp. 2495- 2501.
- [5] I. Made Gede Sunarya, Eko Mulyanto Yuniarno, Tri Arief Sardjono, Ismoyo Sunu, P. M. A. (Peter) van Ooijen I. Ketut Eddy Purnama (2020) 3D reconstruction of carotid artery in B-mode ultrasound image using modified template matching based on ellipse feature. *Computer Methods in Biomechanics and Biomedical Engineering: Imaging Visualization*, 8:3, 301-312.
- [6] J. Guerrero, S. E. Salcudean, J. A. McEwen, B. A. Masri and S. Nicolaou, "Real-Time Vessel Segmentation and Tracking for Ultrasound Imaging Applications," in *IEEE Transactions on Medical Imaging*, vol. 26, no. 8, pp. 1079-1090, Aug. 2007.
- [7] M. Ikhsan, K. K. Tan, A. S. Putra, T. H. Sophia Chew and C. F. Kong, "Automatic identification of blood vessel cross-section for central venous catheter placement using a cascading classifier," 2017 39th Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC), 2017.
- [8] J. Zhang, Z. Lu and M. Li, "Finger-vein image segmentation based on KFCM and active contour model," 2019 IEEE International Instrumentation and Measurement Technology Conference (I2MTC), 2019.
- [9] X. Yang et al., "Towards Automated Semantic Segmentation in Prenatal Volumetric Ultrasound," in *IEEE Transactions on Medical Imaging*, vol. 38, no. 1, pp. 180-193, Jan. 2019.
- [10] N. Abraham, K. Illanko, N. Khan and D. Androustos, "Deep Learning for Semantic Segmentation of Brachial Plexus Nerves in Ultrasound Images Using U-Net and M-Net," 2019 3rd International Conference on Imaging, Signal Processing and Communication (ICISPC), 2019.
- [11] Yang J, Faraji M, Basu A. Robust segmentation of arterial walls in intravascular ultrasound images using Dual-Path U-Net. *Ultrasonis*. 2019 Jul.
- [12] L. Yuan et al., "Multi-Objects Change Detection Based on Res-Unet," 2021 IEEE International Geoscience and Remote Sensing Symposium IGARSS, 2021.
- [13] G. Ramos-Llordén, G. Vegas-Sánchez-Ferrero, M. Martín-Fernandez, C. Alberola-López and S. Aja-Fernández, "Anisotropic Diffusion Filter With Memory Based on Speckle Statistics for Ultrasound Images," in *IEEE Transactions on Image Processing*, vol. 24, no. 1, pp. 345-358, Jan. 2015
- [14] O. Ronneberger, P. Fischer, T. Brox, "U-Net: Convolutional Networks for Biomedical Image Segmentation", *MICCAI 2015*, 2015.
- [15] V. Atliha and D. Šešok, "Comparison of VGG and ResNet used as Encoders for Image Captioning," 2020 IEEE Open Conference of Electrical, Electronic and Information Sciences (eStream), 2020.
- [16] C. A. R. Goyzueta, J. E. C. De la Cruz and W. A. M. Machaca, "Integration of U-Net, ResU-Net and DeepLab Architectures with Intersection Over Union metric for Cells Nuclei Image Segmentation," 2021 IEEE Engineering International Research Conference (EIRCON), 2021.
- [17] Li X, Hong Y, Kong D, Zhang X. Automatic segmentation of levator hiatus from ultrasound images using U-net with dense connections. *Phys Med Biol*. 2019.